


## Y Polyester Cloth







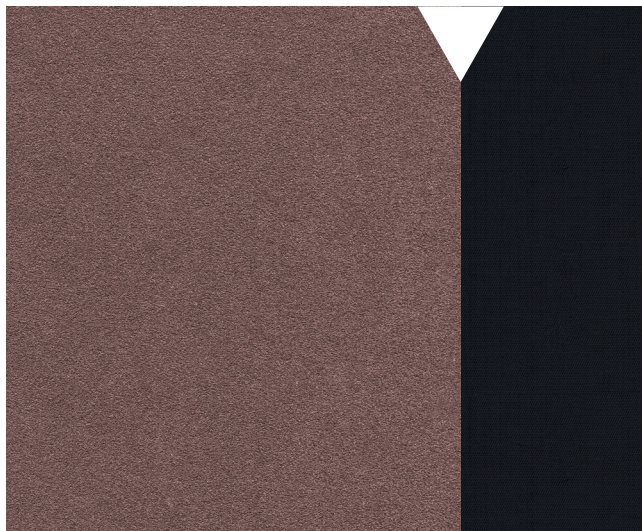


### RG996

Ideal for sanding stainless steel, high alloy steel, heat resistant steel, low alloy steel, aluminum, zamak and cast iron materials in multi-joint segmented belts, wide belts, narrow belts and rolls. Y polyester cloth backing with close coated 100% Ceramic abrasive. Suitable for wet applications.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
<b>RG996</b>	100% Ceramic	Y Polyester Cloth	Closed	1650	60 - 120

Grit Range															
				60	80	100	120								

Product Forms				
 Jumbo	 Segmented Belt (Multi Joint)	 Wide Belt	 Narrow Belt	 Roll
 Disc	 Velcro Disc	 Flap Wheel	 Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant