


Product Data Sheet







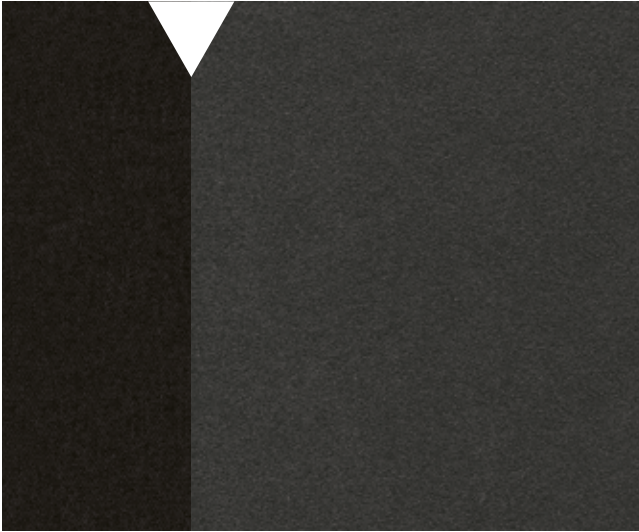




Y Polyester Cloth

RC851

Ideal for sanding MDF, particle board, laminate board, plywood, wood, parquet, plastic, rubber, leather, aluminum, zamak, brass, copper, non-ferrous metals, glass, stone, granite and ceramic materials in single-joint segmented belts, wide belts, narrow belts, rolls, discs and velcro discs. Thick Y polyester cloth backing and closed coating coarse Silicon Carbide abrasive. Ideal for coarse sanding applications with coarse grits (40, 60 and 80).

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RC851	Silicon Carbide	Y Polyester Cloth	Closed	1400	36 - 400

Grit Range																	
	36	40	50	60	80	100	120	150	180	220	240	280	320	400			

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant