

SOLUTIONS CATALOGUE



Company Profile

Yurt, with its 30 years of experience in Innovative Industrial Solutions, cooperates with many leading global companies in its sector.

Providing service with its innovative products in the developing industrialization and ever-expanding industrial solutions market, Yurt has built all its processes on meeting the needs and expectations of its customers with high performance.

Based in Turkey, Yurt is a global player operating in many markets, primarily in Europe.

Since the founding of the company in 2010, Yurt has gained a good place in the abrasive industry by launching numerous new products.

Our Vision

To increase customer satisfaction and loyalty by offering our innovative products with superior performance and quality in the industrial solutions sector,

To become a highly preferred international brand by continuously increasing our global market share by making a difference in competitive power,

To maintain by increasing the importance and value we attach to sustainability, environmental awareness, human safety and education.





Innovative

Yurt maintains its place as leader in the sector by anticipating its customers's requirements to create innovative technologies. Finding new solutions to help customers improve their industrial processes drives the company's everyday decisions.



Industrial

Focusing on superior technology and customer support, Yurt is one of the top suppliers in the global abrasive industry. Having a worldwide network, company have operations, not only in Europe, but also in various important global bases.



Solutions

As the leader in the abrasive industry, Yurt does not only offer products to its customers, it offers solutions that are tailored to individual customer requirements. Yurt provides added value abrasive solutions generated as a result of innovative ideas that aim to revolutionise abrasive industry.

Value Chain

Yurt, which has warehouses in major parts of the world, the largest in Turkey, has many abrasive products in its portfolio. Instead of a classic supply chain, Yurt offers creating or adding value to the end product at every step, from conception through production to delivery and support.





Demand Planning

Getting frequent forecasts from its current customers and estimating the best possibilities from the potential new customers, Yurt prepares precise and accurate demand predictions.



Global Partners

Feeding its global partners with the best demands received from its customers, its resources can manage their production program in an excellent way. Yurt offers high quality through full control of all production steps, from the procurement of raw materials to the manufacture of products and delivery to customers.



Fast Operations

Combining physical strength and quick thinking, Yurt makes sure that arrival, storage and delivery of the products are conducted under best and fastest conditions.

Marketing & Sales

Yurt is one of the world's leading distributors in the abrasive industry, focusing on deep Marketing & Sales operations. With its global sales network and a team of experienced marketing professionals and engineers, Yurt offers top-quality service.





Marketing

Yurt constantly invests to maintain its marketing tools at the highest levels of technology and automation, to ensure customers always receive excellence in terms of information and knowledge.



Sales

Boasting various sales locations around the globe, Yurt is uniquely equipped with sales professionals to tend to the requirements of all regional markets and customers in a highly versatile manner.




Service

Yurt is constantly available to its customers - whether by phone, email or on site. Yurt engineering staff will find out the features of the products and always find the best solution for the customers' specific application requirements.

Brands

Yurt represents reputable industry leaders in their sectors which are also global brands having operations all around the world.



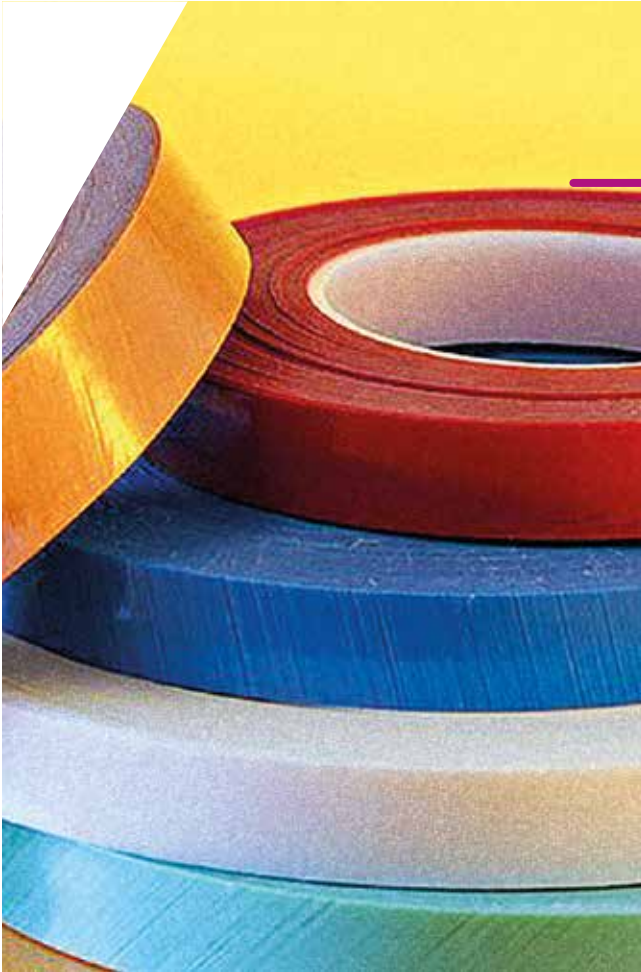

Sheldahl

Sheldahl Flexible Technologies, located in United States, manufactures materials and circuits used by the automotive, medical, industrial, and consumer industries marketed worldwide, providing space and weight saving solutions combining its know-how and technical experience to enable greater technological possibilities. Sheldahl is one of biggest manufacturers in the world, supplying Endless Belt Splicing Tapes for all Global Abrasive Market.



White Dove

White Dove, located in China, manufactures various abrasive materials and products used in various industrial applications. One of the best in its production program, it is a global leader with its Abrasive Cloths for Segmented Belts used in the Wood Calibration Industry. White Dove is one of the biggest manufacturers in the world, supplying Abrasives for all Global Abrasive Market.



Endless Belt Splicing Tapes


Sheldahl created a perfect solution over 40 years ago when it patented the Sheldahl brand unidirectional splicing system. This system combines tape, adhesive, curative, and your belt material, optimized for high-performance and cost-effectiveness. Sanding, abrasive grinding, and polishing belts run at accelerated speeds, creating high temperatures during operation.

Dependable tapes are required for bonding the two sides of the endless belts together to keep them from operational malfunctions. Unidirectional tapes are a cost-effective and durable solution that increases the lifecycle of abrasive belts.

Technical Table

| Product Name | Colour | Product Code | Tape Thickness (max.) (mm) | Tensile Strength (min.) (N/cm) | Technical Details | Grit Range | Features | | |
|--------------|---|--------------|----------------------------|--------------------------------|---|------------|------------------|------------------|-----------------------------------|
| | | | | | | | High Versatility | High Flexibility | High Heat and Abrasion Resistance |
| Pink |  | T1880 | 0,094 | 290 | Thin, highest flex | 120+ | | | |
| Blue |  | T1884 | 0,185 | 542 | High tensile along with good flex | 40-100 | | • | |
| White |  | T1882 | 0,145 | 402 | Versatile combination of flex and strength | 60-120 | • | | |
| Pearl White |  | T9071 | 0,152 | 490 | Versatile, superior strength and flex, rougher surface | 60-120 | • | | |
| Yellow |  | T1930 | 0,069 | 175 | Ultra thin, for finest grit applications | 320+ | | | |
| Green |  | T1886 | 0,239 | 595 | Highest strength, strong abrasion and hinge resistance | 16-60 | | | |
| Fabric |  | T1878 | 0,178 | 420 | Flexible, in air tools with non-woven applications for surface conditioning | All | | | |

Technical Comparison

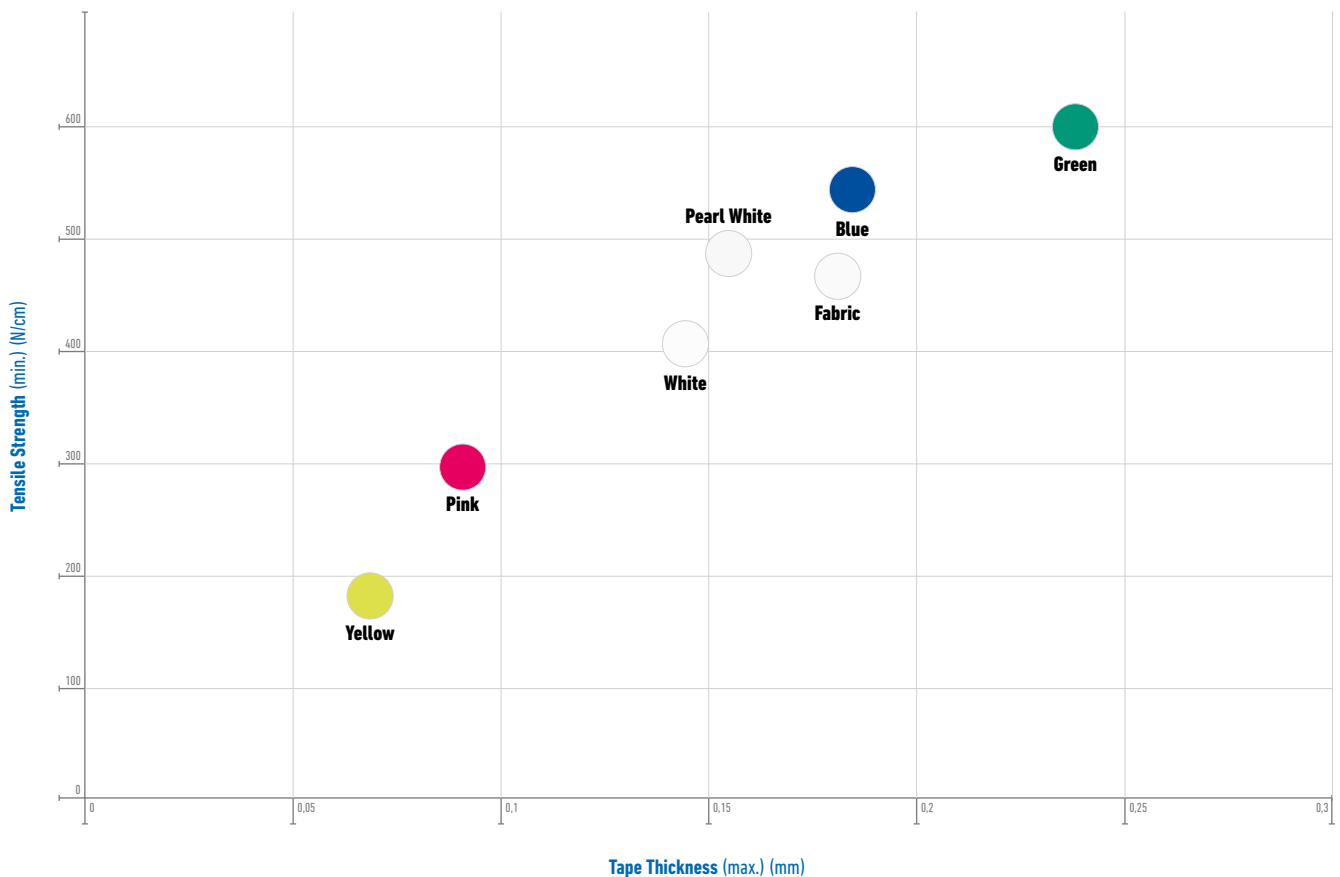

Sheldahl

Pink T1880

Thin, highest flex.




Technical Data

Product Name : Pink
 Product Code : T1880
 Tape Thickness : Max. 0,094 mm
 Tensile Strength : Min. 290 N/cm

Technical Details : Thin, highest flex
 Grit Range : 120+

| Product Name / Code | Angle | Width (mm) | Roll Length (m) | Article No. | Product Description |
|---------------------|-------|------------|-----------------|---|---|
| Pink / T1880 | 67° | 19 | 200 | 148572-508 | Pink, 67°, 19 mm, 200 Meters |
| | | 19 | 100 | 148572-501 | Pink, 67°, 19 mm, 100 Meters |
| | | 16 | 100 | 148572-506 | Pink, 67°, 16 mm, 100 Meters |
| | | 25.4 | 100 | 148572-502 | Pink, 67°, 25.4 mm, 100 Meters |
| | 75° | 19 | 100 | 148575-505 | Pink, 75°, 19 mm, 100 Meters |
| | | 16 | 100 | 148575-508 | Pink, 75°, 16 mm, 100 Meters |
| | | 10 | 100 | 148575-507 | Pink, 75°, 10 mm, 100 Meters |
| | | 25.4 | 100 | 148575-503 | Pink, 75°, 25.4 mm, 100 Meters |
| | 55° | 19 | 200 | 148570-505 | Pink, 55°, 19 mm, 200 Meters |
| | | 19 | 100 | 148570-501 | Pink, 55°, 19 mm, 100 Meters |
| | 80° | 19 | 200 | 148576-504 | Pink, 80°, 19 mm, 100 Meters |
| | 45° | 19 | 100 | 148569-502 | Pink, 45°, 19 mm, 100 Meters |
| | 67R° | 19 | 100 | 148566-501 | Pink, 67°, Reverse Angle, 19 mm, 100 Meters |
| | | 25.4 | 100 | 148566-502 | Pink, 67°, Reverse Angle, 25.4 mm, 100 Meters |
| 75R° | 19 | 100 | 148567-501 | Pink, 75°, Reverse Angle, 19 mm, 100 Meters | |



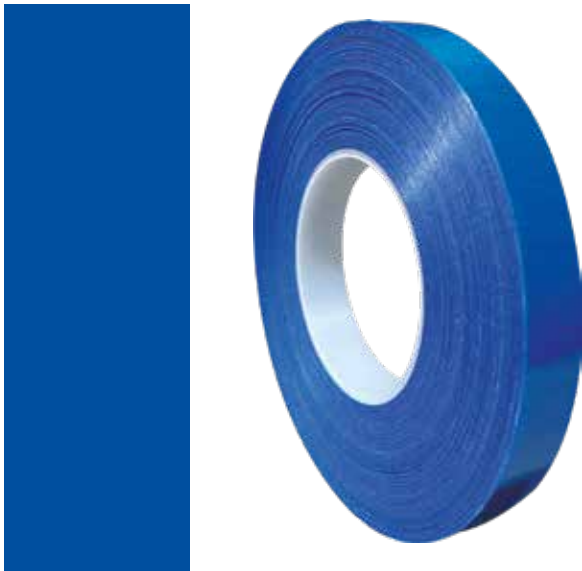

Sheldahl

Blue T1884

High tensile along with good flex.

Technical Data

Product Name : Blue
 Product Code : T1884
 Tape Thickness : Max. 0,185 mm
 Tensile Strength : Min. 542 N/cm

Technical Details : High tensile along with good flex
 Grit Range : 40-100
 Features : High Flexibility

| Product Name / Code | Angle | Width (mm) | Roll Length (m) | Article No. | Product Description |
|---------------------|-------|------------|-----------------|-------------|---|
| Blue / T1884 | 67° | 19 | 100 | 174631-502 | Blue, 67°, 19 mm, 100 Meters |
| | | 19 | 200 | 174631-522 | Blue, 67°, 19 mm, 200 Meters |
| | | 25 | 100 | 174631-505 | Blue, 67°, 25.4 mm, 100 Meters |
| | 75° | 19 | 100 | 175129-504 | Blue, 75°, 19 mm, 100 Meters |
| | | 19 | 200 | 175129-503 | Blue, 75°, 19 mm, 200 Meters |
| | | 16 | 100 | 175129-502 | Blue, 75°, 16 mm, 100 Meters |
| | | 10 | 100 | 175129-508 | Blue, 75°, 10 mm, 100 Meters |
| | 55° | 25.4 | 100 | 175129-507 | Blue, 75°, 25.4 mm, 100 Meters |
| | | 19 | 100 | 174632-502 | Blue, 55°, 19 mm, 100 Meters |
| | | 25.4 | 100 | 174632-503 | Blue, 55°, 25.4 mm, 100 Meters |
| | 80° | 19 | 100 | 177887-502 | Blue, 80°, 19 mm, 100 Meters |
| | 90° | 19 | 100 | 178571-502 | Blue, 90°, 19 mm, 100 Meters |
| | 45° | 19 | 100 | 177882-502 | Blue, 45°, 19 mm, 100 Meters |
| | 67R° | 19 | 100 | 175902-502 | Blue, 67°, Reverse Angle, 19 mm, 100 Meters |
| | | 25.4 | 100 | 175902-503 | Blue, 67°, Reverse Angle, 25.4 mm, 100 Meters |
| | 75R° | 19 | 100 | 175217-505 | Blue, 75°, Reverse Angle, 19 mm, 100 Meters |
| | | 25.4 | 100 | 175217-503 | Blue, 75°, Reverse Angle, 25.4 mm, 100 Meters |
| | 80R° | 19 | 100 | 148598-502 | Blue, 80°, Reverse Angle, 19 mm, 100 Meters |



Sheldahl

White T1882

Versatile combination of flex and strength.




Technical Data

Product Name : White
 Product Code : T1882
 Tape Thickness : Max. 0,145 mm
 Tensile Strength : Min. 402 N/cm

Technical Details : Versatile combination of flex and strength
 Grit Range : 60-120
 Features : High Versatility

| Product Name / Code | Angle | Width (mm) | Roll Length (m) | Article No. | Product Description |
|---------------------|-------|------------|-----------------|-------------|--|
| White / T1882 | 67° | 19 | 100 | 148587-501 | White, 67°, 19 mm, 100 Meters |
| | | 19 | 200 | 148587-509 | White, 67°, 19 mm, 200 Meters |
| | | 16 | 100 | 148587-511 | White, 67°, 16 mm, 100 Meters |
| | | 25.4 | 100 | 148587-502 | White, 67°, 25.4 mm, 100 Meters |
| | 67R° | 19 | 100 | 148581-501 | White, 67°, Reverse Angle, 19 mm, 100 Meters |
| | | 25.4 | 100 | 148581-508 | White, 67°, Reverse Angle, 25.4 mm, 100 Meters |
| | 75° | 19 | 100 | 148590-507 | White, 75°, 19 mm, 100 Meters |
| | | 16 | 100 | 148590-506 | White, 75°, 16 mm, 100 Meters |
| | | 25.4 | 100 | 148590-508 | White, 75°, 25.4 mm, 100 Meters |
| | 75R° | 19 | 100 | 148582-501 | White, 75° Reverse Angle, 19 mm, 100 Meters |
| | | 25.4 | 100 | 148582-502 | White, 75°, Reverse Angle, 25.4 mm, 100 Meters |
| | 80° | 19 | 100 | 148591-501 | White, 80°, 19 mm, 100 Meters |
| | 80R° | 19 | 100 | 188965-502 | White, 80°, Reverse Angle, 19 mm, 100 Meters |
| | 55° | 19 | 100 | 148585-501 | White, 55°, 19 mm, 100 Meters |
| | | 25.4 | 100 | 148585-502 | White, 55°, 25.4 mm, 100 Meters |
| | 45° | 19 | 100 | 148584-501 | White, 45°, 19 mm, 100 Meters |





Sheldahl

Pearl White T9071


Versatile, superior strength and flex, rougher surface.

Technical Data

Product Name : Pearl White
 Product Code : T9071
 Tape Thickness : Max. 0,152 mm
 Tensile Strength : Min. 490 N/cm

Technical Details : Superior strength and flex, rougher surface
 Grit Range : 60-120
 Features : High versatility


| Product Name / Code | Angle | Width (mm) | Roll Length (m) | Article No. | Product Description |
|---------------------|-------|------------|-----------------|-------------|--|
| Pearl White / T9071 | 67° | 19 | 100 | 189383-502 | Pearl White, 67°, 19 mm, 100 Meters |
| | | 19 | 200 | 189383-522 | Pearl White, 67°, 19 mm, 200 Meters |
| | | 25.4 | 100 | 189383-503 | Pearl White, 67°, 25.4 mm, 100 Meters |
| | 75° | 19 | 100 | 189381-502 | Pearl White, 75°, 19 mm, 100 Meters |
| | | 16 | 100 | 189381-505 | Pearl White, 75°, 16 mm, 100 Meters |
| | | 25 | 100 | 189381-503 | Pearl White, 75°, 25 mm, 100 Meters |
| | 75R° | 19 | 100 | 189384-502 | Pearl White, 75°, Reverse Angle, 19 mm, 100 Meters |

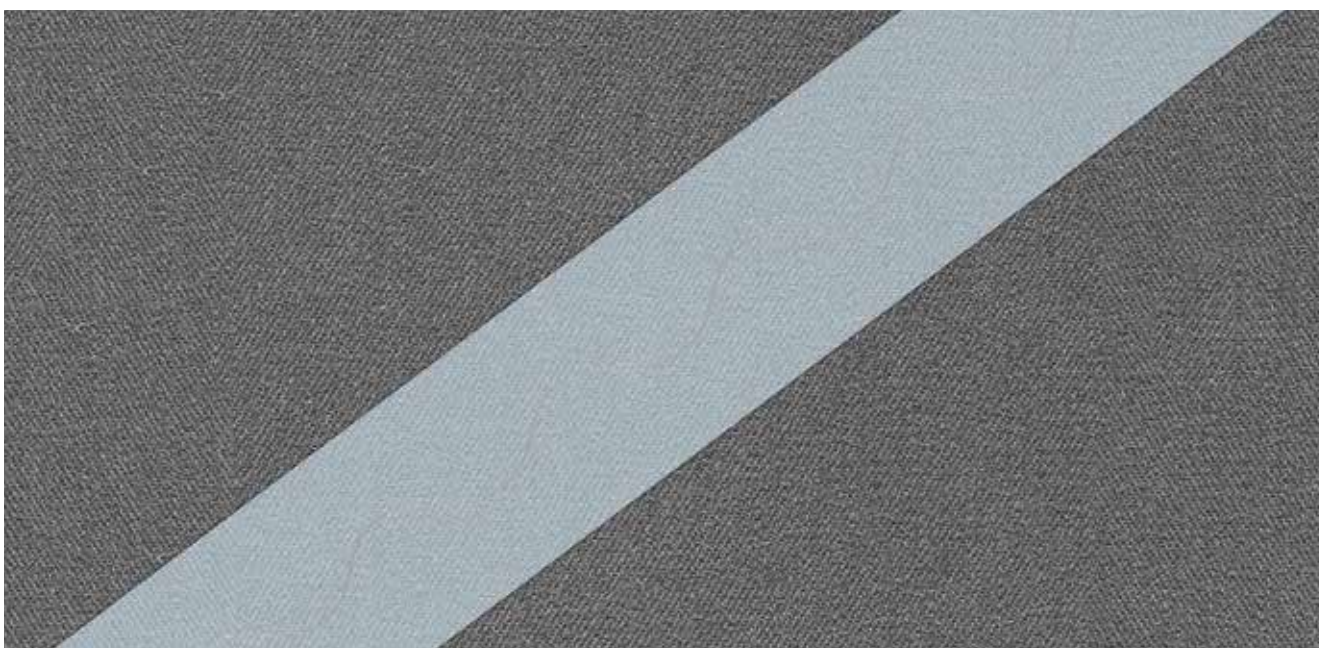

Sheldahl

Green T1886

Highest strength, strong abrasion and hinge resistance.





Technical Data

Product Name : Green
 Product Code : T1886
 Tape Thickness : Max. 0,239 mm
 Tensile Strength : Min. 595 N/cm

Technical Details : Highest strength, strong abrasion and hinge resistance
 Grit Range : 16-60

| Product Name / Code | Angle | Width (mm) | Roll Length (m) | Article No. | Product Description |
|---------------------|-------|------------|-----------------|--|--|
| Green / T1886 | 67° | 19 | 100 | 175868-502 | Green, 67°, 19 mm, 100 Meters |
| | | 25.4 | 100 | 175868-503 | Green, 67°, 25.4 mm, 100 Meters |
| | 75° | 19 | 100 | 177888-502 | Green, 75°, 19 mm, 100 Meters |
| | | 16 | 100 | 177888-504 | Green, 75°, 16 mm, 100 Meters |
| | | 25.4 | 100 | 177888-503 | Green, 75°, 25.4 mm, 100 Meters |
| | 67R° | 19 | 100 | 178420-002 | Green, 67°, Reverse Angle, 19 mm, 100 Meters |
| 25.4 | | 100 | 178420-503 | Green, 67°, Reverse Angle, 25.4 mm, 100 Meters | |

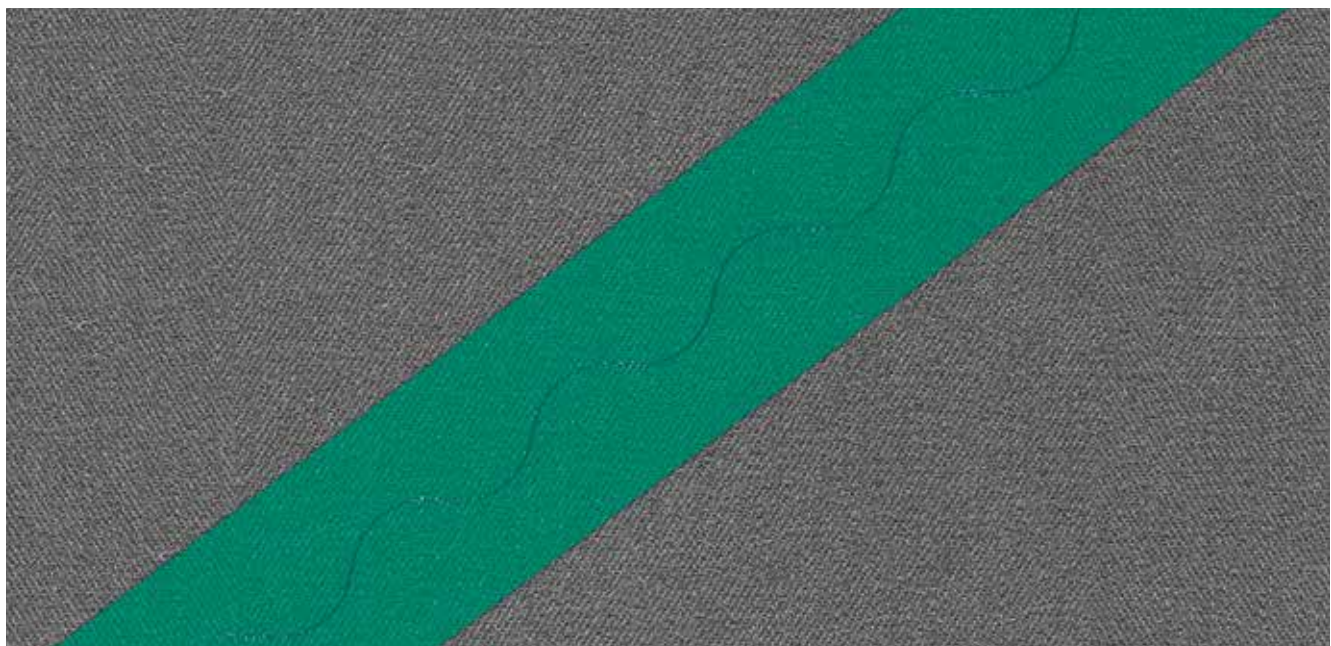



Sheldahl

Yellow T1930


Ultra thin, for finest grit applications.

Technical Data

Product Name : Yellow
 Product Code : T1930
 Tape Thickness : Max. 0,069 mm
 Tensile Strength : Min. 175 N/cm

Technical Details : Ultra thin, for finest grit applications
 Grit Range : 320+

| Product Name / Code | Angle | Width (mm) | Roll Length (m) | Article No. | Product Description |
|---------------------|-------|------------|-----------------|-------------|----------------------------------|
| Yellow / T1930 | 67° | 19 | 100 | 177888-506 | Yellow, 67°, 19 mm, 100 Meters |
| | | 25.4 | 100 | 148681-002 | Yellow, 67°, 25.4 mm, 100 Meters |
| | 75° | 19 | 100 | 148682-501 | Yellow, 75°, 19 mm, 100 Meters |
| | | 25 | 100 | 148682-002 | Yellow, 75°, 25 mm, 100 Meters |

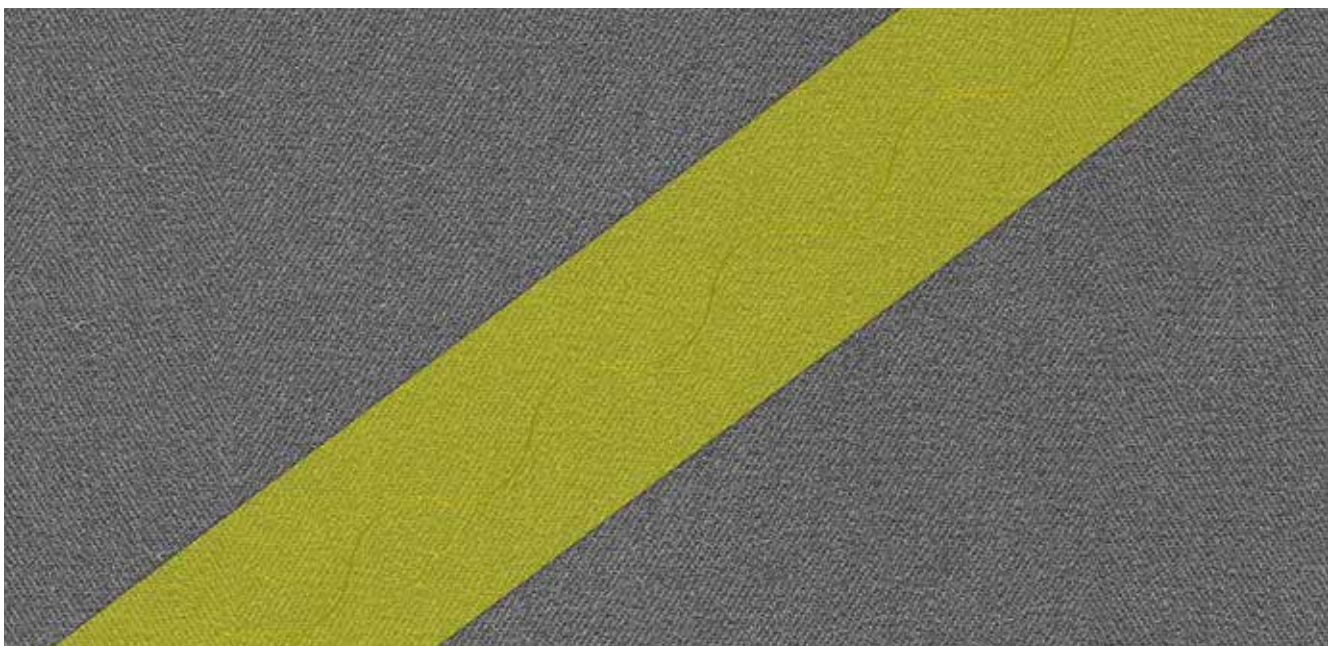

Sheldahl

Fabric T1878

Flexible, in air tools with non-woven applications for surface conditioning.




Technical Data

Product Name : Fabric
 Product Code : T1878
 Tape Thickness : Max. 0,178 mm
 Tensile Strength : Min. 420 N/cm

Technical Details : Flexible, in air tools with non-woven applications for surface conditioning
 Grit Range : All

| Product Name / Code | Angle | Width (mm) | Roll Length (m) | Article No. | Product Description |
|---------------------|-------|------------|-----------------|-------------|----------------------------------|
| Fabric / T1878 | 67° | 19 | 100 | 162936-502 | Fabric, 67°, 19 mm, 100 Meters |
| | | 25.4 | 100 | 162936-503 | Fabric, 67°, 25.4 mm, 100 Meters |
| | | 38.1 | 100 | 162936-506 | Fabric, 67°, 38.1 mm, 100 Meters |
| | 75° | 19 | 100 | 163075-502 | Fabric, 75°, 19 mm, 100 Meters |
| | | 25.4 | 100 | 163075-503 | Fabric, 75°, 25.4 mm, 100 Meters |
| | 55° | 19 | 100 | 165921-502 | Fabric, 55°, 19 mm, 100 Meters |

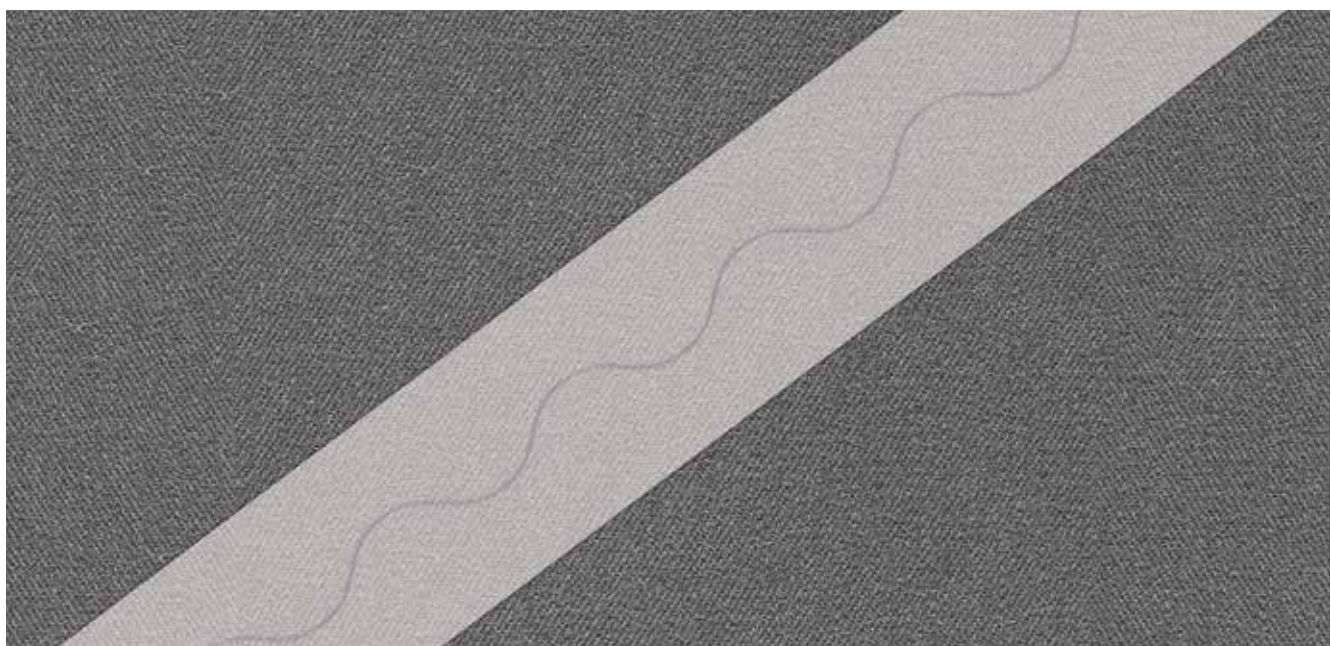



Abrasive Belts & Rolls

White Dove manufactures various coated abrasives used in various industrial applications. White Dove is one of the biggest manufacturers in the world, supplying coated abrasives for all Global Abrasive Market.



Technical Table

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range | Grit Range | | | | | | | | | | | | | | | | | | | |
|---------------|-------------------------|-----------------------------|---------------------|------------------|------------|------------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|
| | | | | | | 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | 1200 |
| PEK41 | Aluminum Oxide | E Weight Paper | Antistatic & Closed | 1400 | 40 - 1000 | | | ● | ○ | ● | ● | ● | ● | ● | ● | ○ | ● | ○ | ● | ● | ○ | ○ | ○ | ○ | |
| PEC51 | Silicon Carbide | | Antistatic & Closed | 1650 | 60 - 1000 | | | ○ | ○ | ● | ● | ● | ● | ● | ● | ○ | ● | ○ | ● | ● | ○ | ● | ○ | ○ | ○ |
| RS736 | Aluminum Oxide | J Flexible Polycotton Cloth | Closed | 1400 | 60 - 1000 | | | | | ○ | ● | ● | ● | ● | ○ | ● | ○ | ● | ● | ○ | ● | ○ | ○ | ○ | |
| RS737 | Aluminum Oxide | | Stearate & Closed | 1400 | 60 - 1000 | | | | | ○ | ● | ● | ● | ● | ○ | ● | ○ | ● | ● | ○ | ● | ○ | ○ | ○ | ○ |
| RC781 | Silicon Carbide | | Closed | 1400 | 60 - 1000 | | | | | ○ | ● | ● | ● | ● | ○ | ● | ○ | ● | ● | ○ | ● | ○ | ○ | ○ | ○ |
| RC781S | Silicon Carbide | | Stearate & Closed | 1400 | 60 - 1000 | | | | | ○ | ● | ● | ● | ● | ○ | ● | ○ | ● | ● | ○ | ● | ○ | ○ | ○ | ○ |
| RZ739 | Zirconia | | Closed | 1400 | 60 - 1000 | | | | | ○ | ● | ● | ● | ● | ○ | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| RG739 | 100% Ceramic | | Topsize & Closed | 1400 | 60 - 600 | | | | | ○ | ● | ● | ● | ● | ○ | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| GXK51 | Aluminum Oxide | | X Cotton Cloth | Closed | 1420 | 40 - 1000 | | | ○ | ○ | ● | ● | ● | ● | ● | ○ | ● | ○ | ● | ● | ○ | ● | ○ | ○ | ○ |
| XA811 | Aluminum Oxide | X Polycotton Cloth | Closed | 1420 | 120 - 1000 | | | | | | | | | ○ | ○ | ○ | ○ | ○ | ● | ● | ● | ● | ● | ● | |
| GM775 | Aluminum Oxide | | Closed | 1400 | 40 - 120 | | | | | ● | ○ | ● | ● | ● | | | | | | | | | | | |
| GZ777 | Zirconia | | Closed | 1400 | 40 - 120 | | | | | ● | ● | ● | ● | ● | | | | | | | | | | | |
| RM862 | Aluminum Oxide | Y Polyester Cloth | Closed | 1420 | 36 - 1000 | | | ○ | ● | ○ | ● | ● | ● | ● | ○ | ● | ○ | ● | ● | ○ | ○ | ○ | ○ | ○ | |
| RC851 | Silicon Carbide | | Closed | 1400 | 36 - 400 | | | | ○ | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | | | | | | |
| RC861 | Silicon Carbide | | Antistatic & Closed | 1400 | 36 - 400 | | | | ○ | ● | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | | | | | | |
| RC881 | Silicon Carbide | | Antistatic & Closed | 1650 | 36 - 400 | | | | ○ | ○ | ○ | ● | ● | ● | ● | ○ | ○ | ○ | ○ | | | | | | |
| RZ865 | Zirconia | | Closed | 1420 | 40 - 1000 | | | | | ● | ○ | ● | ● | ● | ● | ○ | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| RZ874 | Zirconia | | Closed | 1400 | 36 - 120 | | | | | ● | ● | ○ | ○ | ○ | ○ | | | | | | | | | | |
| RZ777 | Zirconia | | Semi Open | 1450 | 24 - 120 | | | | ● | ● | ● | ○ | ● | ● | ● | | | | | | | | | | |
| RZ873 | 100% Zirconia | | Closed | 1420 | 24 - 120 | | | | ○ | ○ | ● | ○ | ● | ● | ● | | | | | | | | | | |
| RG865 | Ceramic | | Closed | 1420 | 40 - 400 | | | | | ○ | ○ | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | | | | | |
| RG865S | Ceramic | | Topsize & Closed | 1420 | 40 - 400 | | | | | ○ | ○ | ● | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | | | | | |
| RG996 | 100% Ceramic | | Closed | 1650 | 36 - 180 | | | | | ○ | ○ | ○ | ● | ● | ● | ○ | ○ | | | | | | | | |
| RCK71 | Compact Aluminum Oxide | | Semi Open | 1420 | 80 - 1200 | | | | | | | | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| RCK81 | Compact Aluminum Oxide | | Semi Open | 1420 | 80 - 1200 | | | | | | | | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| RCC71 | Compact Silicon Carbide | | Semi Open | 1400 | 80 - 1200 | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| RCC81 | Compact Silicon Carbide | | Semi Open | 1400 | 80 - 1200 | | | | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| RZ877 | 100% Zirconia | | Z Polyester Cloth | Topsize & Closed | 1420 | 24 - 120 | | | ○ | ● | ● | ○ | ● | ● | ● | | | | | | | | | | |
| RZ887 | 100% Zirconia | Topsize & Closed | | 1420 | 24 - 120 | | | | ○ | ● | ● | ○ | ● | ● | ● | | | | | | | | | | |
| RG997 | Ceramic & Zirconia | Topsize & Closed | | 1420 | 24 - 120 | | | | ○ | ● | ● | ○ | ● | ● | ● | | | | | | | | | | |
| RG998 | 100% Ceramic | Topsize & Closed | | 1420 | 24 - 120 | | | | ○ | ● | ● | ○ | ● | ● | ● | | | | | | | | | | |

E Weight Paper










PEK41

Ideal for sanding wood, low alloy steel, stainless steel, plastic, rubber, leather, paint, varnish, lacquer in wide belts narrow belts, rolls, discs and velcro discs. Antistatic E weight paper and also antistatic coating (which prevents the sticking of dust) with resined over glue closed coated Aluminum Oxide abrasive.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|----------------|---------------------|------------------|------------|
| PEK41 | Aluminum Oxide | E Weight Paper | Antistatic & Closed | 1400 | 40 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | | |
|------------|--|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|--|
| | | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












E Weight Paper

PEC51

Ideal for sanding wood, aluminum, zamak, brass, copper, non-ferrous metals, plastic, rubber, leather, glass, stone, granite, ceramic in wide belts, rolls, discs and velcro discs. Antistatic E weight paper and also antistatic coating (which prevents the sticking of dust) with resin over resin closed coated Silicon Carbide abrasive.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|-----------------|----------------|---------------------|------------------|------------|
| PEC51 | Silicon Carbide | E Weight Paper | Antistatic & Closed | 1650 | 40 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | | |
|------------|--|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|--|
| | | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |


| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

J Flexible Polycotton Cloth





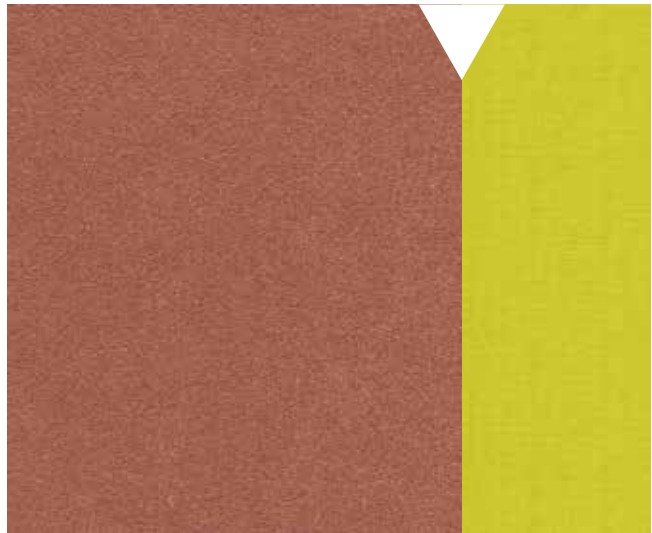




RS736

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum and zamak in narrow belts, rolls and flap wheels. J flexible poly-cotton cloth backing with closed coated Aluminum Oxide abrasive. Flexible structure, ideal for polishing.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-----------------------------|---------|------------------|------------|
| RS736 | Aluminum Oxide | J Flexible Polycotton Cloth | Closed | 1400 | 60 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|----|-----------|------------|------------|------------|------------|-----|------------|-----|------------|------------|-----|------------|-----|------|
| | | | | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












J Flexible Polycotton Cloth

RS737

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum and zamak in narrow belts and rolls. J flexible poly-cotton cloth backing with closed coated Aluminum Oxide abrasive. Also has Stearate coating for anti-clogging feature. Flexible structure, ideal for polishing.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-----------------------------|-------------------|------------------|------------|
| RS737 | Aluminum Oxide | J Flexible Polycotton Cloth | Stearate & Closed | 1400 | 60 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|----|-----------|------------|------------|------------|------------|-----|------------|-----|------------|------------|-----|------------|-----|------|
| | | | | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

J Flexible Polycotton Cloth










RC781

Ideal for sanding brass, copper, non-ferrous steel, aluminum, zamak, plastic, rubber, leather, glass, stone, granite, ceramic, wood, low alloy steel and stainless steel materials in narrow belt sand rolls. Light weight J flexible poly-cotton cloth backing with Silicon Carbide abrasive. Flexible structure, ideal for polishing hardware sanitary.




| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|-----------------|-----------------------------|---------|------------------|------------|
| RC781 | Silicon Carbide | J Flexible Polycotton Cloth | Closed | 1400 | 60 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|--|
| | | | | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

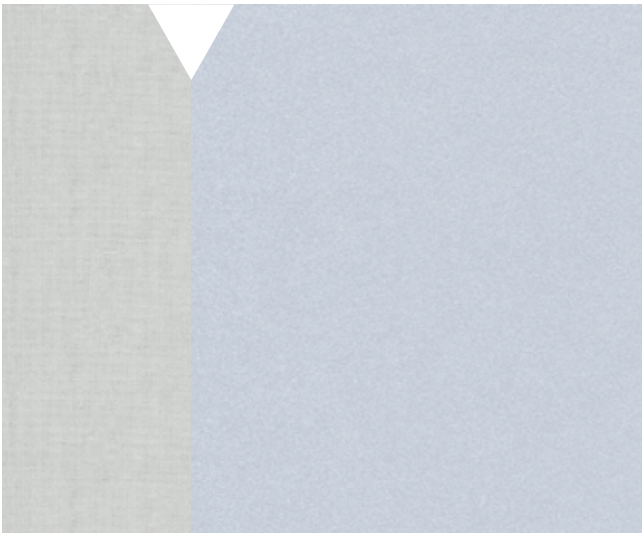










J Flexible Polycotton Cloth

RC781S

Ideal for sanding brass, copper, non-ferrous steels, aluminum, zamak, plastic, rubber, leather, glass, stone, granite, ceramic, wood, low alloy steel and stainless steel materials in narrow belt sand rolls. Light weight J flexible poly-cotton cloth backing with Silicon Carbide abrasive. Also has Stearate coating for anti-clogging feature. Flexible structure, ideal for polishing hardware sanitary.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|-----------------|-----------------------------|-------------------|------------------|------------|
| RC781S | Silicon Carbide | J Flexible Polycotton Cloth | Stearate & Closed | 1400 | 60 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| | | | | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

J Flexible Polycotton Cloth










RZ739

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum and zamak materials in narrow belts and rolls. J flexible poly-cotton cloth backing with close coated Zirconia abrasive. Flexible structure, ideal for polishing. Long service lifetime.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-----------------------------|---------|------------------|------------|
| RZ739 | Zirconia | J Flexible Polycotton Cloth | Closed | 1400 | 60 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|------|
| | | | | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | | 600 | 800 | 1000 |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












J Flexible Polycotton Cloth

RG739

Ideal for sanding stainless steel, high alloy steel, heat resistant steel, cast iron, aluminum, zamak, brass, copper, non-ferrous steels, plastic, rubber, leather in narrow belts and rolls. J flexible poly-cotton cloth backing with 100% Ceramic abrasive, also with friction and heat resistant Topsize coating. Long service lifetime.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-----------------------------|------------------|------------------|------------|
| RG739 | 100% Ceramic | J Flexible Polycotton Cloth | Topsize & Closed | 1400 | 60 - 400 |

| Grit Range | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|----|-----------|------------|------------|------------|------------|-----|------------|-----|-----|-----|--|--|--|--|
| | | | | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | | | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |


| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

X Cotton Cloth





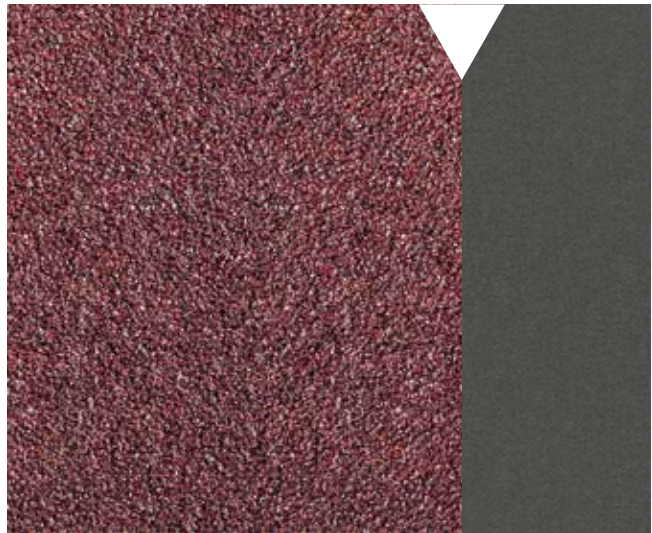

GXK51

Ideal for sanding wood, parquet, low alloy steel, stainless steel, aluminum, zamak, brass, copper, non-ferrous metals, paint, varnish, lacquer, plastic, rubber, leather, cast iron, glass, stone, granite and ceramic materials in narrow belts, rolls, velcro discs and flap wheels. Soft X cotton cloth backing with closed coated Aluminum Oxide abrasive.




| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|----------------|---------|------------------|------------|
| GXK51 | Aluminum Oxide | X Cotton Cloth | Closed | 1420 | 40 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | | |
|------------|--|----|----|-----------|-----------|------------|------------|------------|------------|-----|------------|-----|------------|------------|-----|------------|-----|------|--|
| | | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

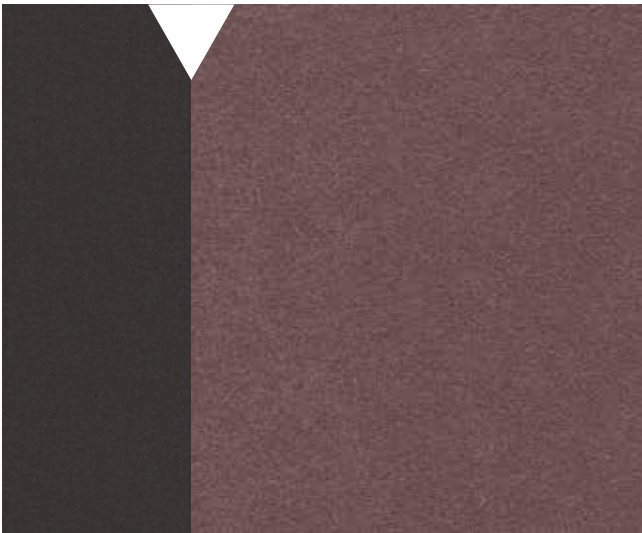










X Polycotton Cloth

XA811

Ideal for sanding PCB copper-clad board, brass, non-ferrous metals, aluminum, zamak, wood, low alloy steel, stainless steel, paint, varnish, lacquer, plastic, rubber, leather, cast iron, glass, stone, granite and ceramic materials in narrow belts, rolls, velcro discs and flap wheels. X poly-cotton cloth backing with closed coated Aluminum Oxide abrasive. Suitable for wet applications.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|--------------------|---------|------------------|------------|
| XA811 | Aluminum Oxide | X Polycotton Cloth | Closed | 1420 | 120 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|--|--|--|--|--|-----|-----|-----|-----|------------|-----|------------|------------|------------|------------|------------|-------------|--|
| | | | | | | | | | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

X Polycotton Cloth










GM775

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, wood, plastic, rubber and leather in flap discs and narrow belts. X poly-cotton cloth backing with closed coated aggressive Aluminum Oxide abrasive.




| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|--------------------|---------|------------------|------------|
| GM775 | Aluminum Oxide | X Polycotton Cloth | Closed | 1400 | 40 - 120 |

| Grit Range | | | | | | | | | | | | | | | |
|------------|--|----|----|----|----|-----|-----|--|--|--|--|--|--|--|--|
| | | 40 | 50 | 60 | 80 | 100 | 120 | | | | | | | | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

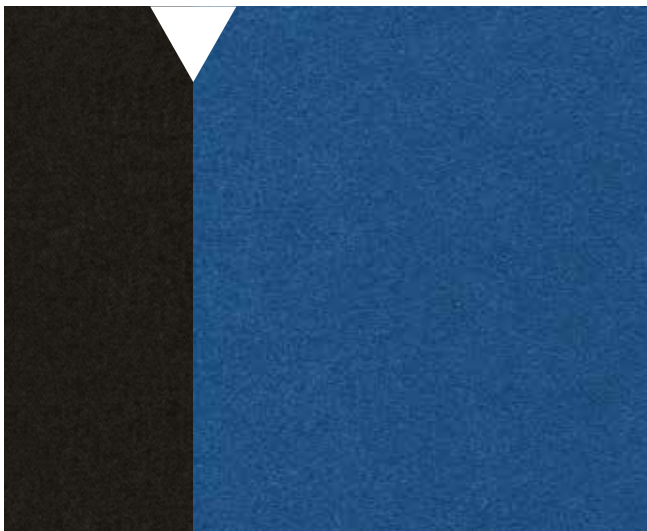










X Polycotton Cloth

GZ777

Ideal for sanding stainless steel, high alloy steel, heat resistant steel, low alloy steel, cast iron, wood, plastic, rubber and leather in flap discs and narrow belts. X poly-cotton cloth backing with closed coated Zirconia abrasive.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|--------------------|---------|------------------|------------|
| GZ777 | Zirconia | X Polycotton Cloth | Closed | 1400 | 40 - 120 |

| Grit Range | | | | | | | | | | | | | | |
|------------|----|--|----|----|-----|-----|--|--|--|--|--|--|--|--|
| | 40 | | 60 | 80 | 100 | 120 | | | | | | | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |


| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Y Polyester Cloth





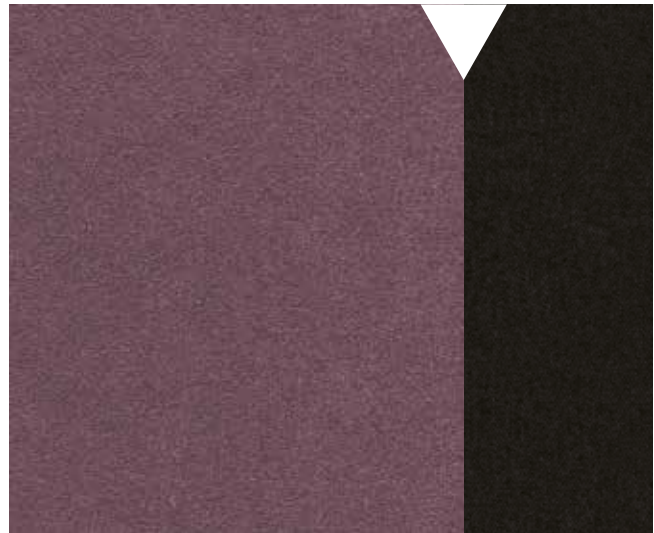




RM862

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, brass, copper, non-ferrous metals, plastic, rubber, leather, glass, stone, granite, ceramic and wood in wide belts, narrow belts, rolls and velcro discs. Y polyester cloth backing with closed coated aggressive Aluminum Oxide abrasive. Suitable for wet applications.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|---------|------------------|------------|
| RM862 | Aluminum Oxide | Y Polyester Cloth | Closed | 1420 | 36 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | |
|------------|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|--|
| 36 | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












Y Polyester Cloth

RC851

Ideal for sanding MDF, particle board, laminate board, plywood, wood, parquet, plastic, rubber, leather, aluminum, zamak, brass, copper, non-ferrous metals, glass, stone, granite and ceramic materials in single-joint segmented belts, wide belts, narrow belts, rolls, discs and velcro discs. Thick Y polyester cloth backing and closed coating coarse Silicon Carbide abrasive. Ideal for coarse sanding applications with coarse grits (40, 60 and 80).

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|-----------------|-------------------|---------|------------------|------------|
| RC851 | Silicon Carbide | Y Polyester Cloth | Closed | 1400 | 36 - 400 |

| Grit Range | | | | | | | | | | | | | | | |
|------------|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| 36 | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |


| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Y Polyester Cloth





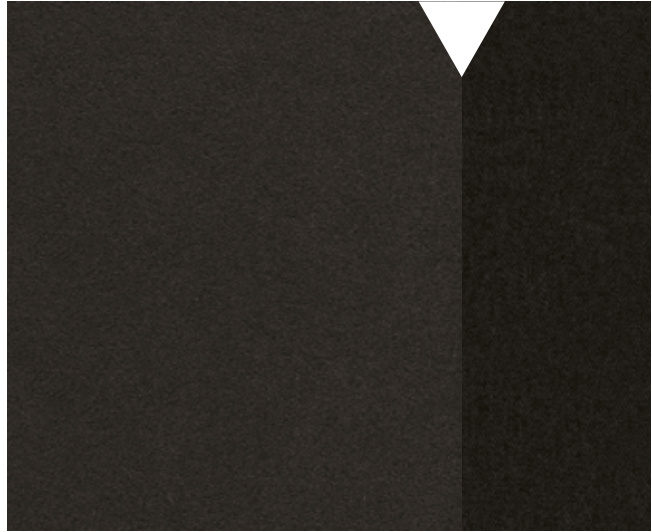




RC861

Ideal for sanding MDF, chipboard, plywood, parquet, plastic, rubber, leather, aluminum, zamak, brass, copper, non-ferrous metals, glass, stone, granite and ceramic materials in single-joint segmented belts, wide belts, narrow belts, rolls, discs and velcro discs. Antistatic Y polyester cloth backing and also antistatic closed coating Silicon Carbide abrasive which prevents dust sticking. Good surface flatness for fine applications.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|-----------------|-------------------|---------------------|------------------|------------|
| RC861 | Silicon Carbide | Y Polyester Cloth | Antistatic & Closed | 1400 | 36 - 400 |

| Grit Range | | | | | | | | | | | | | | | | | |
|------------|-----------|----|----|----|-----|-----|-----|------------|-----|-----|-----|-----|-----|--|--|--|--|
| 36 | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | | | | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












Y Polyester Cloth

RC881

Ideal for sanding HDF, MDF, solid wood, parquet, plastic, rubber, leather, aluminum, zamak, brass, copper, non-ferrous metals, glass, stone, granite and ceramic materials in multi-joint segmented belts, wide belts, narrow belts and rolls. Antistatic Y polyester cloth backing and also antistatic closed coating Silicon Carbide abrasive which prevents dust sticking.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|-----------------|-------------------|---------------------|------------------|------------|
| RC881 | Silicon Carbide | Y Polyester Cloth | Antistatic & Closed | 1650 | 36 - 400 |

| Grit Range | | | | | | | | | | | | | | | |
|------------|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| 36 | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Y Polyester Cloth










RZ865

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, parquet, wood, plastic, rubber and leather in wide belts, narrow belts, rolls, discs and velcro discs. Y polyester cloth backing and closed coated Zirconia and Aluminum Oxide abrasive. Suitable for wet applications. Long service lifetime.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|---------|------------------|------------|
| RZ865 | Zirconia | Y Polyester Cloth | Closed | 1420 | 40 - 1000 |

| Grit Range | | | | | | | | | | | | | | | | | | |
|------------|--|-----------|----|-----------|-----------|------------|------------|------------|------------|-----|------------|-----|-----|-----|--|-----|-----|------|
| | | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | | 600 | 800 | 1000 |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












Y Polyester Cloth

RZ874

Ideal for sanding parquet, solid wood, plastic, leather and rubber in wide belts, narrow belts, rolls, discs and velcro discs. Y polyester cloth backing and closed coated Zirconia abrasive. Designed for floor sanding. Ideal for coarse sanding applications with coarse grits (36 and 40). Suitable for wet applications.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|---------|------------------|------------|
| RZ874 | Zirconia | Y Polyester Cloth | Closed | 1400 | 36 - 120 |

| Grit Range | | | | | | | | | | | | | | | |
|------------|-----------|-----------|----|----|----|-----|-----|--|--|--|--|--|--|--|--|
| | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | | | | | | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Y Polyester Cloth










RZ777

Ideal for sanding parquet, solid wood, plastic, leather and rubber in wide belts, narrow belts, rolls, discs and velcro discs. Y polyester cloth backing and semi open coated Zirconia abrasives. Designed for floor sanding. Suitable for wet applications.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|-----------|------------------|------------|
| RZ777 | Zirconia | Y Polyester Cloth | Semi Open | 1450 | 24 - 120 |

| Grit Range | | | | | | | | | | | | | | | | | |
|------------|----|----|----|----|----|-----|-----|--|--|--|--|--|--|--|--|--|--|
| 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | | | | | | | | | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












Y Polyester Cloth

RZ873

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, plastic, leather and rubber in wide belts, narrow belts, rolls, discs and velcro discs. Y polyester cloth backing and close coated aggressive 100% Zirconia abrasive. Suitable for wet applications.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|---------|------------------|------------|
| RZ873 | 100% Zirconia | Y Polyester Cloth | Closed | 1420 | 24 - 120 |

| Grit Range | | | | | | | | | | | | | | | |
|------------|----|-----------|----|-----------|-----------|------------|------------|--|--|--|--|--|--|--|--|
| 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | | | | | | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Y Polyester Cloth










RG865

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, brass, copper, non-ferrous metals and cast iron materials in wide belts, narrow belts and rolls. Y polyester cloth backing with close coated Ceramic abrasive. Suitable for wet applications.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|---------|------------------|------------|
| RG865 | Ceramic | Y Polyester Cloth | Closed | 1420 | 40 - 400 |

| Grit Range | | | | | | | | | | | | | | | | |
|------------|--|----|----|-----------|-----------|------------|------------|------------|------------|-----|-----|-----|-----|-----|--|--|
| | | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












Y Polyester Cloth

RG865S

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, brass, copper, non-ferrous metals and cast iron materials in wide belts, narrow belts and rolls. Y polyester cloth backing with close coated Ceramic abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|---------------|----------------|-------------------|------------------|------------------|------------|
| RG865S | Ceramic | Y Polyester Cloth | Topsize & Closed | 1420 | 40 - 400 |

| Grit Range | | | | | | | | | | | | | | | | |
|------------|--|----|----|-----------|-----------|------------|------------|------------|------------|-----|-----|-----|-----|-----|--|--|
| | | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |


| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Y Polyester Cloth





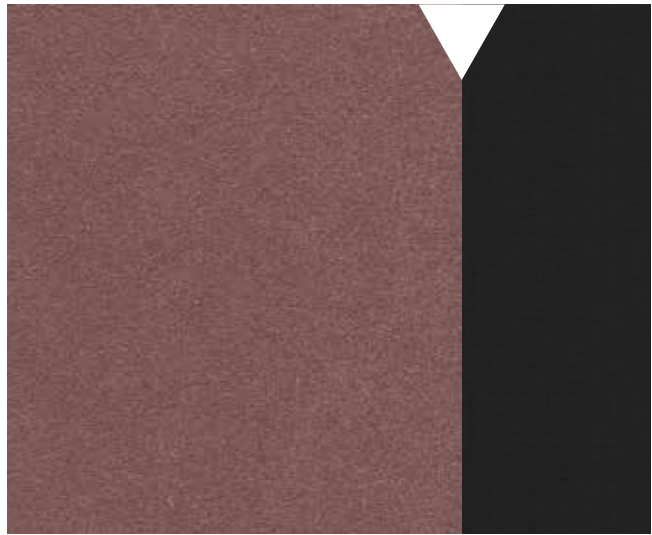




RG996

Ideal for sanding stainless steel, high alloy steel, heat resistant steel, low alloy steel, aluminum, zamak and cast iron materials in multi-joint segmented belts, wide belts, narrow belts and rolls. Y polyester cloth backing with close coated 100% Ceramic abrasive. Suitable for wet applications.



| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|---------|------------------|------------|
| RG996 | 100% Ceramic | Y Polyester Cloth | Closed | 1650 | 36 - 180 |

| Grit Range | | | | | | | | | | | | | | | | | |
|------------|----|----|-----------|-----------|------------|------------|-----|-----|--|--|--|--|--|--|--|--|--|
| 36 | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | | | | | | | | | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |












Y Polyester Cloth

RCC71

Ideal for heavy duty sanding and finishing low alloy steel, stainless steel, high alloy steel, heat resistant steel, glass, stone, granite and ceramic materials in wide belts, narrow belts, rolls, discs and velcro discs; ideal for centerless grinding. Y polyester cloth backing with vitrified bonder of semi open coated Compact Silicon Carbide abrasive. Suitable for dry applications. Long service lifetime.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|-------------------------|-------------------|-----------|------------------|------------|
| RCC71 | Compact Silicon Carbide | Y Polyester Cloth | Semi Open | 1400 | 80 - 1200 |

| Grit Range | | | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|--|--|----|-----|------------|-----|------------|-----|-----|-----|------------|-----|-----|------------|-----|------|------|
| | | | | | | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | 1200 |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Y Polyester Cloth










RCC81

Ideal for middle duty sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, glass, stone, granite and ceramic materials in wide belts, narrow belts, rolls, discs and velcro discs; ideal for centerless grinding. Y polyester cloth backing with resined bonder of semi open coated Compact Silicon Carbide abrasive. Suitable for wet and dry applications.




| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|-------------------------|-------------------|-----------|------------------|------------|
| RCC81 | Compact Silicon Carbide | Y Polyester Cloth | Semi Open | 1400 | 80 - 1200 |

| Grit Range | | | | | | | | | | | | | | | | | | | | |
|------------|--|--|--|--|--|----|-----|------------|-----|------------|-----|-----|-----|------------|-----|-----|------------|-----|------|------|
| | | | | | | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 400 | 500 | 600 | 800 | 1000 | 1200 |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |


| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

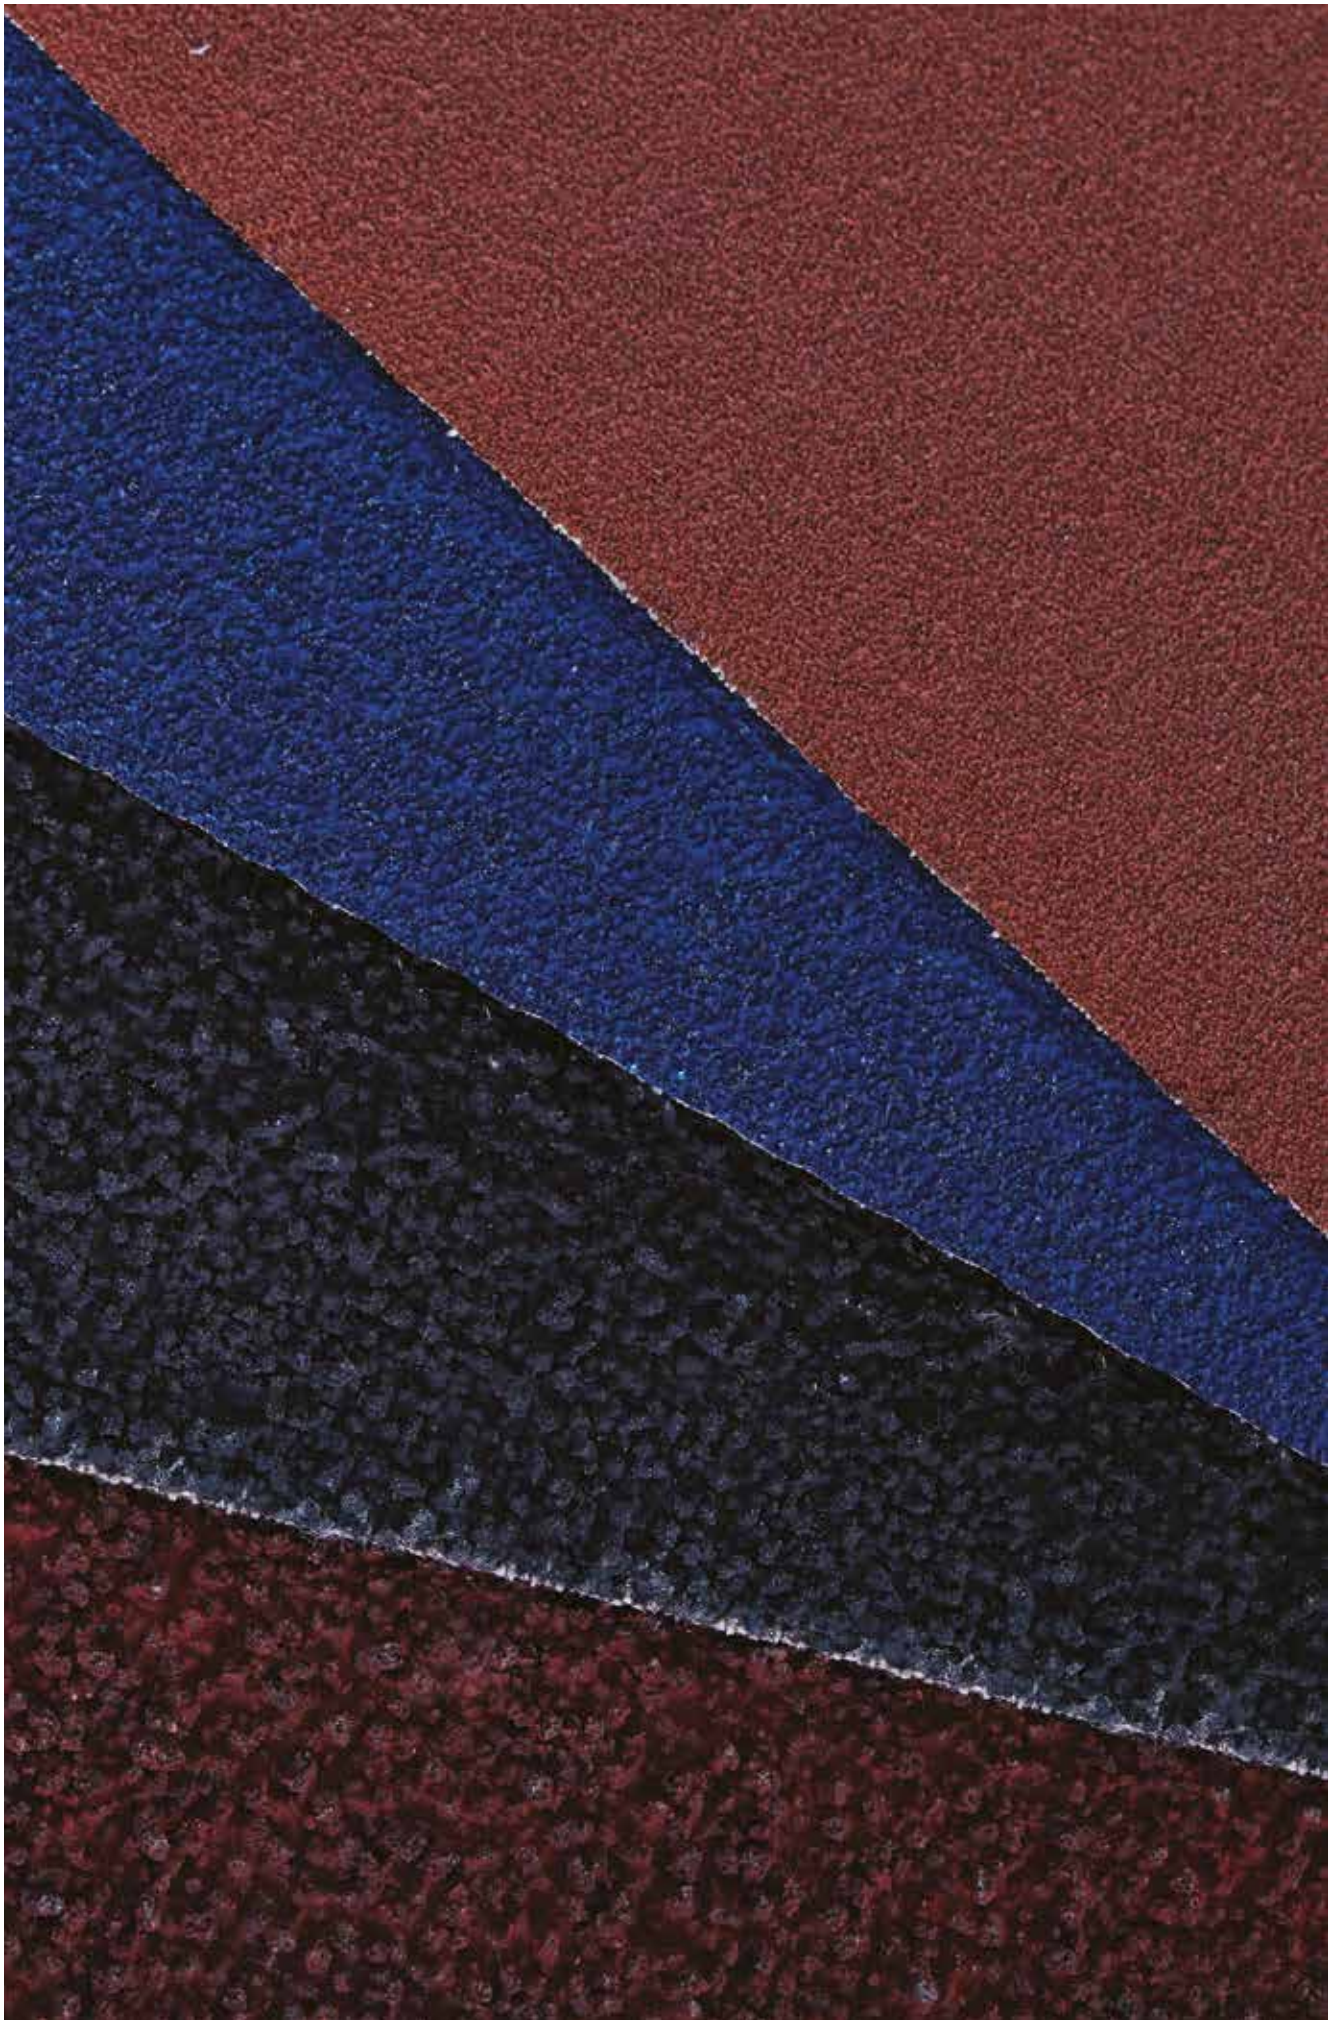

Z Polyester Cloth





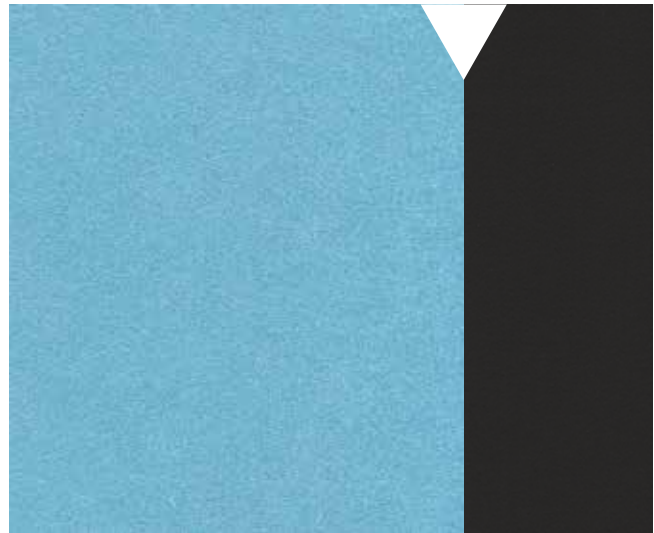




RZ877

Ideal for heavy duty sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, brass, copper, non-ferrous metals and cast iron materials in wide belts, narrow belts and rolls. Z polyester cloth backing with close coated 100% Zirconia abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications. High working efficiency.




| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|------------------|------------------|------------|
| RZ877 | 100% Zirconia | Z Polyester Cloth | Topsize & Closed | 1420 | 24 - 120 |

| Grit Range | | | | | | | | | | | | | | | |
|------------|----|----|----|----|----|-----|-----|--|--|--|--|--|--|--|--|
| 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | | | | | | | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

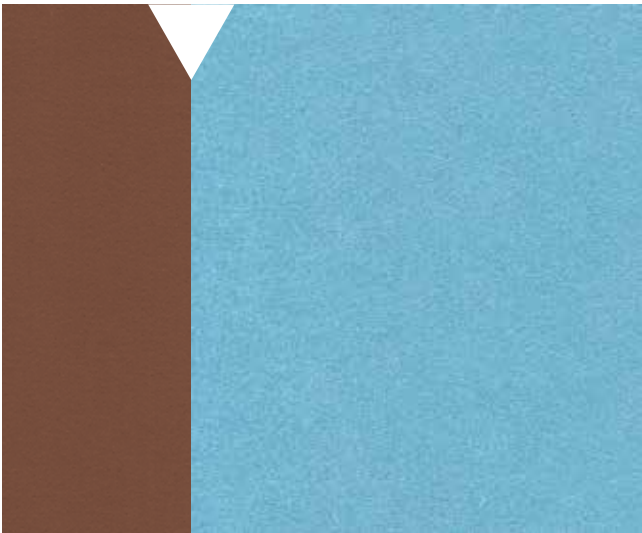










Z Polyester Cloth

RZ887

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, brass, copper, non-ferrous metals and cast iron materials in wide belts, narrow belts and rolls. Z polyester cloth backing with close coated 100% Zirconia abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications. Long service lifetime.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|------------------|------------------|------------|
| RZ887 | 100% Zirconia | Z Polyester Cloth | Topsize & Closed | 1420 | 24 - 120 |

| Grit Range | | | | | | | | | | | | | | | | | |
|------------|-----------|-----------|----|-----------|-----------|------------|------------|--|--|--|--|--|--|--|--|--|--|
| 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | | | | | | | | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |


| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Z Polyester Cloth





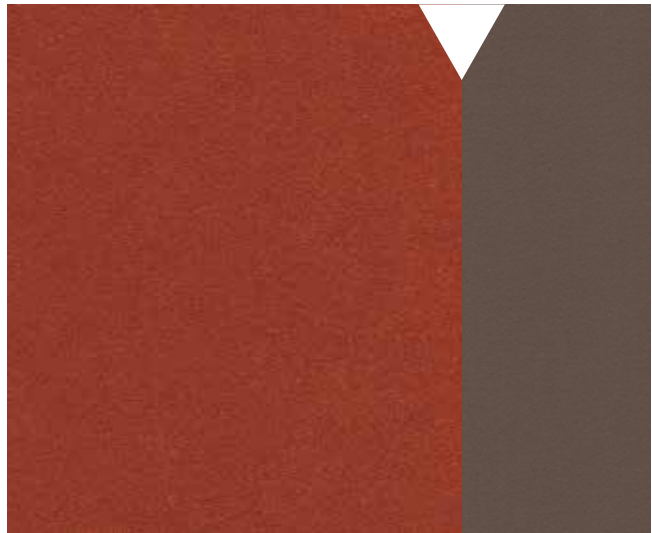




RG997

Ideal for heavy deburring and sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak and cast iron materials in wide belts, narrow belts and rolls. Z polyester cloth backing with close coated Ceramic and Zirconia abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications.




| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|--------------------|-------------------|------------------|------------------|------------|
| RZ877 | Ceramic & Zirconia | Z Polyester Cloth | Topsize & Closed | 1420 | 24 - 120 |

| Grit Range | | | | | | | | | | | | | | | |
|------------|-----------|-----------|----|-----------|-----------|------------|------------|--|--|--|--|--|--|--|--|
| 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | | | | | | | |

| Product Forms | | | | |
|--|---|---|---|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |

| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

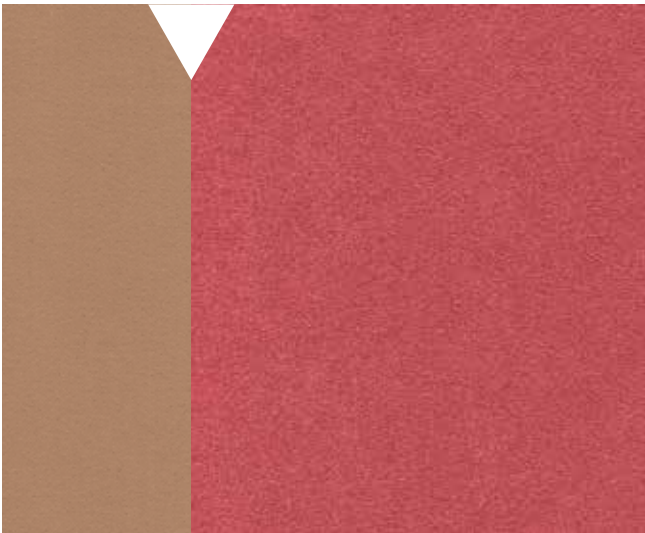










Z Polyester Cloth

RG998

Ideal for heavy deburring and sanding cast iron, high alloy steel, heat resistant steel, low alloy steel, stainless steel, aluminum, zamak and cast iron materials in wide belts, narrow belts and rolls. Z polyester cloth backing with close coated 100% Ceramic abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications.

| Product Code | Abrasive Grain | Backing | Coating | Jumbo Width (mm) | Grit Range |
|--------------|----------------|-------------------|------------------|------------------|------------|
| RG998 | 100% Ceramic | Z Polyester Cloth | Topsize & Closed | 1420 | 24 - 120 |

| Grit Range | | | | | | | | | | | | | | | |
|------------|-----------|-----------|----|-----------|-----------|------------|------------|--|--|--|--|--|--|--|--|
| 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | | | | | | | |

| Product Forms | | | | |
|--|---|---|--|---|
|  Jumbo |  Segmented Belt (Multi Joint) |  Wide Belt |  Narrow Belt |  Roll |
|  Disc |  Velcro Disc |  Flap Wheel |  Flap Disc | |


| Application Areas | | | |
|---|-------------------------|-------------------------------------|---------------------------|
| Wood | Parquet / Floor Sanding | Low Alloy Steel | Stainless Steel / Inox |
| High Alloy Steel / Heat Resistant Steel | Aluminium / Zamak | Brass / Copper / Non Ferrous Metals | Paint / Varnish / Lacquer |
| Plastic / Rubber / Leather | Cast Iron | Glass / Stone / Granite / Ceramic | |

| Features | | |
|--------------------------|-------------------------------|--------------------------------------|
| Antistatic Feature | Suitable for Wet Applications | Friction & Heat Absorbant (Top Size) |
| Anti-Clogging (Stearate) | Flexible for Curved Surfaces | Tear Resistant |

Velcro Abrasives

Yurt offers variety of light weight backing velcro abrasives that can be supplied either in jumbo roll form or in velcro disc form, mainly be used with orbital sanders in various applications.

Offering different product options, Yurt stays as one of biggest distributors in the world, supplying Velcro Abrasive for all global abrasive market.

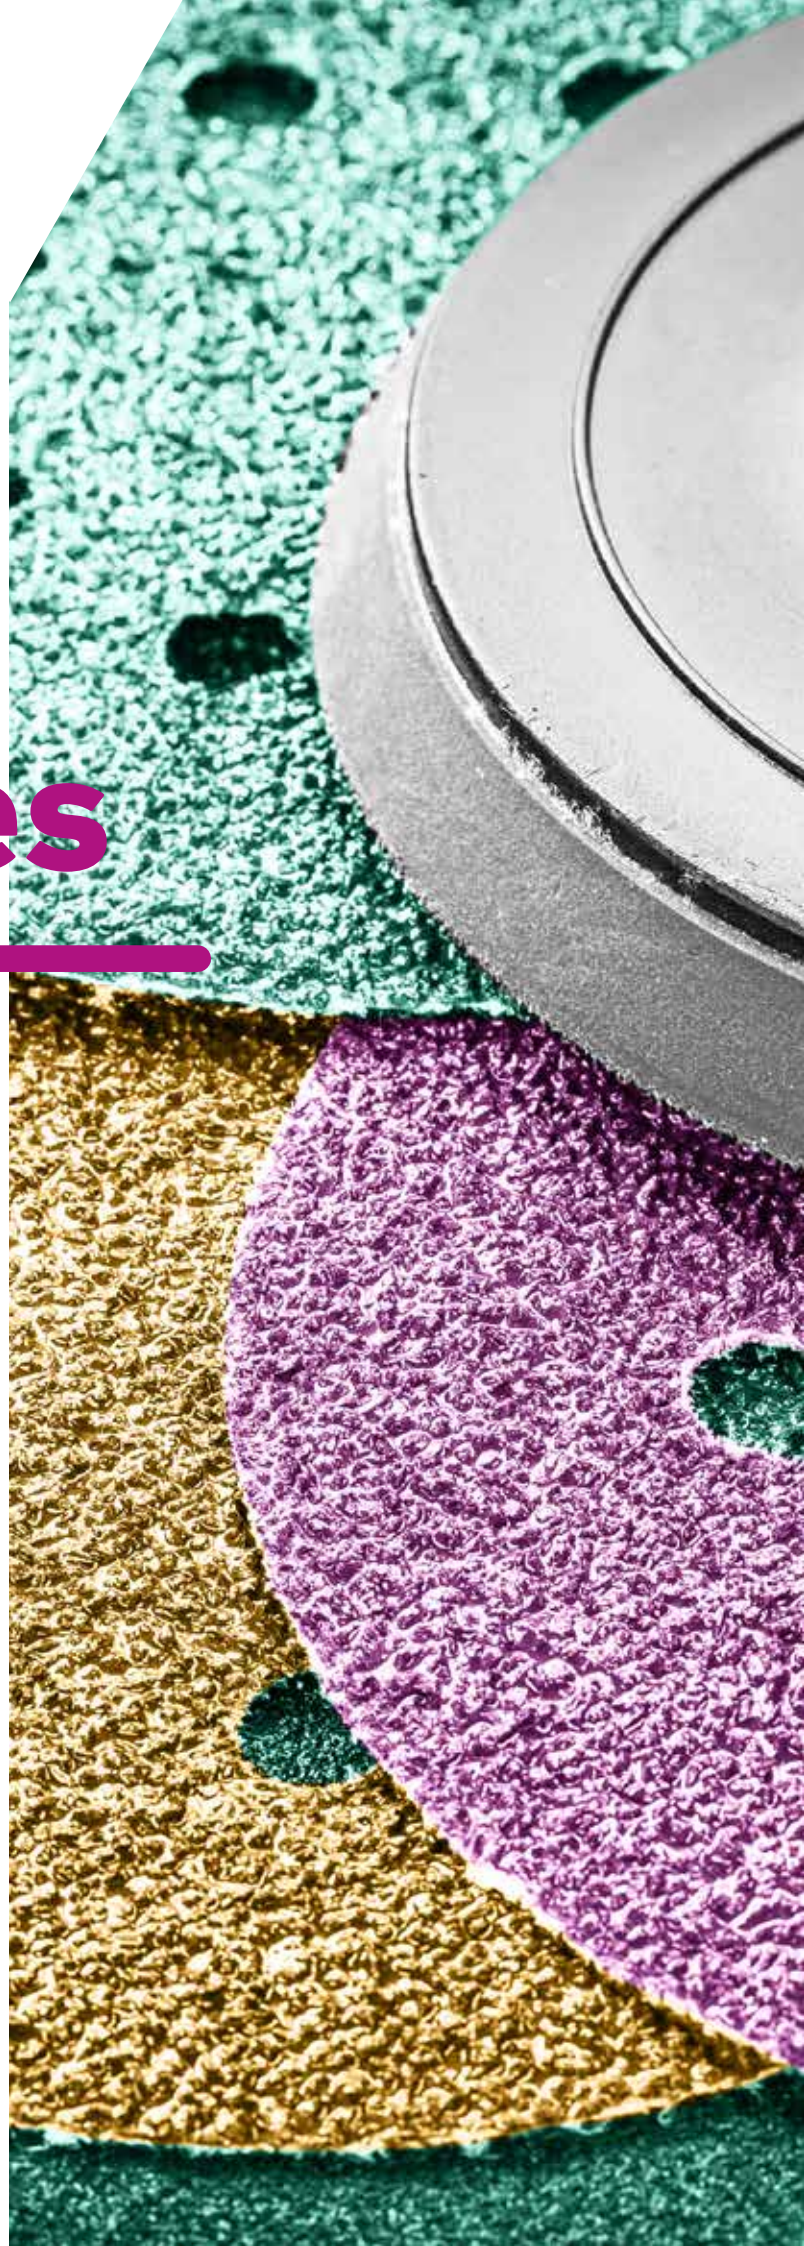

Green Aluminum Oxide
Polyester Film Backing
Velcro Abrasive

Velcro Jumbo
APF1-V-JB

Ideal for sanding various types of surfaces in automotive, paint, marine, wood and stainless steel sectors. Polyester film backing with semi-open coated Aluminum Oxide abrasive, also with anti-clogging Stearate coating which allows faster cutting, long lifetime and constant grinding. Ideal for sanding paint and primer in automotive industry. Suitable for dry and wet applications. Tear resistant.




Technical Data

| | | |
|---------------------------------------|--|--|
| Product Code : APF1-V-JB | Jumbo Width : 1380 mm | App. Area : Automotive, Paint, Marine, Stainless Steel, Wood Sectors |
| Abrasive : Aluminum Oxide | Grit Range : 40, 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 500, 600, 800, 1000, 1200, 1500, 2000 | Features : Suitable for Dry and Wet Applications. Tear Resistant. Anti-Clogging Stearate Coating. |
| Backing : Polyester Film | App. Method : Jumbo | |
| Coating : Semi-Open & Stearate | | |
| Version : Standard | | |

| Product Code | Product Description |
|----------------|---|
| APF1-V-JB-40 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 40 |
| APF1-V-JB-60 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 60 |
| APF1-V-JB-80 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 80 |
| APF1-V-JB-100 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 100 |
| APF1-V-JB-120 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 120 |
| APF1-V-JB-150 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 150 |
| APF1-V-JB-180 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 180 |
| APF1-V-JB-220 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 220 |
| APF1-V-JB-240 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 240 |
| APF1-V-JB-280 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 280 |
| APF1-V-JB-320 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 320 |
| APF1-V-JB-400 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 400 |
| APF1-V-JB-500 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 500 |
| APF1-V-JB-600 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 600 |
| APF1-V-JB-800 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 800 |
| APF1-V-JB-1000 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 1000 |
| APF1-V-JB-1200 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 1200 |
| APF1-V-JB-1500 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 1500 |
| APF1-V-JB-2000 | APF1 - Green Aluminum Oxide Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 2000 |



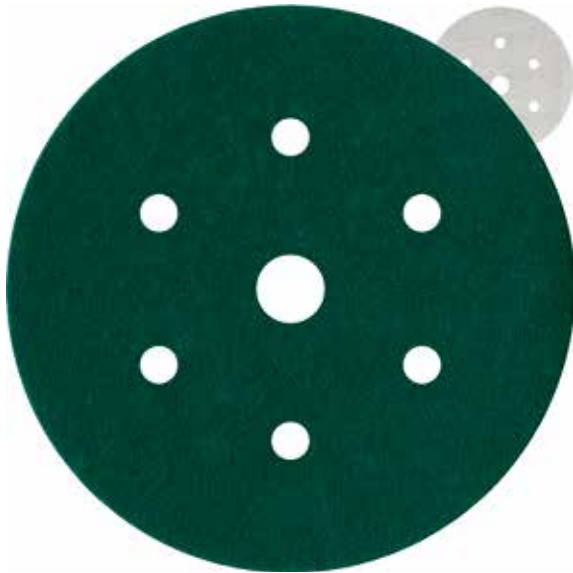

Green Aluminum Oxide Polyester Film Backing Velcro Abrasive


Velcro Disc APF1-V-D

Ideal for sanding various types of surfaces in automotive, paint, marine, wood and stainless steel sectors. Polyester film backing with semi-open coated Aluminum Oxide abrasive, also with anti-clogging Stearate coating which allows faster cutting, long lifetime and constant grinding. Ideal for sanding paint and primer in automotive industry. Suitable for dry and wet applications. Tear resistant. Can be produced with the required dimensions.

Technical Data


| | | |
|--------------------------------|---|---|
| Product Code : APF1-V-D | Dimension : Upon Request | App. Area : Automotive, Paint, Marine, Stainless Steel, Wood Sectors |
| Abrasive : Aluminum Oxide | Grit Range : 40, 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 500, 600, 800, 1000, 1200, 1500, 2000 | Features : Suitable for Dry and Wet Applications. Tear Resistant. Anti-Clogging Stearate Coating. |
| Backing : Polyester Film | App. Method : Orbital Sander | |
| Coating : Semi-Open & Stearate | | |
| Version : Standard | | |

| Type | Size | Grit | Product Code |
|------|------|------|----------------------|
| | 115 | 40 | APF1-V-D-40-115-D0 |
| | 115 | 60 | APF1-V-D-60-115-D0 |
| | 115 | 80 | APF1-V-D-80-115-D0 |
| | 115 | 100 | APF1-V-D-100-115-D0 |
| | 115 | 120 | APF1-V-D-120-115-D0 |
| | 115 | 150 | APF1-V-D-150-115-D0 |
| | 115 | 180 | APF1-V-D-180-115-D0 |
| | 115 | 220 | APF1-V-D-220-115-D0 |
| | 115 | 240 | APF1-V-D-240-115-D0 |
| | 115 | 280 | APF1-V-D-280-115-D0 |
| | 115 | 320 | APF1-V-D-320-115-D0 |
| | 115 | 400 | APF1-V-D-400-115-D0 |
| | 115 | 500 | APF1-V-D-500-115-D0 |
| | 115 | 600 | APF1-V-D-600-115-D0 |
| | 115 | 800 | APF1-V-D-800-115-D0 |
| | 115 | 1000 | APF1-V-D-1000-115-D0 |
| | 115 | 1200 | APF1-V-D-1200-115-D0 |
| | 115 | 1500 | APF1-V-D-1500-115-D0 |
| | 115 | 2000 | APF1-V-D-2000-115-D0 |
| | 125 | 40 | APF1-V-D-40-125-D0 |
| | 125 | 60 | APF1-V-D-60-125-D0 |
| | 125 | 80 | APF1-V-D-80-125-D0 |
| | 125 | 100 | APF1-V-D-100-125-D0 |
| | 125 | 120 | APF1-V-D-120-125-D0 |
| | 125 | 150 | APF1-V-D-150-125-D0 |
| | 125 | 180 | APF1-V-D-180-125-D0 |
| | 125 | 220 | APF1-V-D-220-125-D0 |
| | 125 | 240 | APF1-V-D-240-125-D0 |
| | 125 | 280 | APF1-V-D-280-125-D0 |
| | 125 | 320 | APF1-V-D-320-125-D0 |
| | 125 | 400 | APF1-V-D-400-125-D0 |
| | 125 | 500 | APF1-V-D-500-125-D0 |
| | 125 | 600 | APF1-V-D-600-125-D0 |
| | 125 | 800 | APF1-V-D-800-125-D0 |
| | 125 | 1000 | APF1-V-D-1000-125-D0 |
| | 125 | 1200 | APF1-V-D-1200-125-D0 |
| | 125 | 1500 | APF1-V-D-1500-125-D0 |
| | 125 | 2000 | APF1-V-D-2000-125-D0 |



No Holes

| Type | Size | Grit | Product Code |
|------|------|------|----------------------|
| | 150 | 40 | APF1-V-D-40-150-D7 |
| | 150 | 60 | APF1-V-D-60-150-D7 |
| | 150 | 80 | APF1-V-D-80-150-D7 |
| | 150 | 100 | APF1-V-D-100-150-D7 |
| | 150 | 120 | APF1-V-D-120-150-D7 |
| | 150 | 150 | APF1-V-D-150-150-D7 |
| | 150 | 180 | APF1-V-D-180-150-D7 |
| | 150 | 220 | APF1-V-D-220-150-D7 |
| | 150 | 240 | APF1-V-D-240-150-D7 |
| | 150 | 280 | APF1-V-D-280-150-D7 |
| | 150 | 320 | APF1-V-D-320-150-D7 |
| | 150 | 400 | APF1-V-D-400-150-D7 |
| | 150 | 500 | APF1-V-D-500-150-D7 |
| | 150 | 600 | APF1-V-D-600-150-D7 |
| | 150 | 800 | APF1-V-D-800-150-D7 |
| | 150 | 1000 | APF1-V-D-1000-150-D7 |
| | 150 | 1200 | APF1-V-D-1200-150-D7 |
| | 150 | 1500 | APF1-V-D-1500-150-D7 |
| | 150 | 2000 | APF1-V-D-2000-150-D7 |



7 Holes

Purple Ceramic
Polyester Film Backing
Velcro Abrasive

Velcro Jumbo
CEPF1-V-JB

Ideal for sanding various types of surfaces in metal industries. Polyester film backing with semi-open coated Ceramic abrasive, also with friction and heat resistant special Top Size coating. Ideal for sanding stainless steel and high alloy steel materials. Suitable for dry and wet applications. Tear resistant.




Technical Data

| | | |
|--------------------------------|--|--|
| Product Code : CEPF1-V-JB | Version : Standard | App. Area : Stainless Steel and High Alloy Steel Materials |
| Abrasive : Ceramic | Jumbo Width : 1380 mm | Features : Suitable for Dry and Wet Applications, Friction and Heat Absorbant and Tear Resistant |
| Backing : Polyester Film | Grit Range : 40, 60, 80, 100, 120, 150, 180, 220, 240, 320, 400, 600 | |
| Coating : Semi-Open & Top Size | App. Method : Jumbo | |

| Product Code | Product Description |
|----------------|---|
| CEPF1-V-JB-40 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 40 |
| CEPF1-V-JB-60 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 60 |
| CEPF1-V-JB-80 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 80 |
| CEPF1-V-JB-100 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 100 |
| CEPF1-V-JB-120 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 120 |
| CEPF1-V-JB-150 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 150 |
| CEPF1-V-JB-180 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 180 |
| CEPF1-V-JB-220 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 220 |
| CEPF1-V-JB-240 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 240 |
| CEPF1-V-JB-320 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 320 |
| CEPF1-V-JB-400 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 400 |
| CEPF1-V-JB-600 | CEPF1 - Purple Ceramic Polyester Film Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 600 |



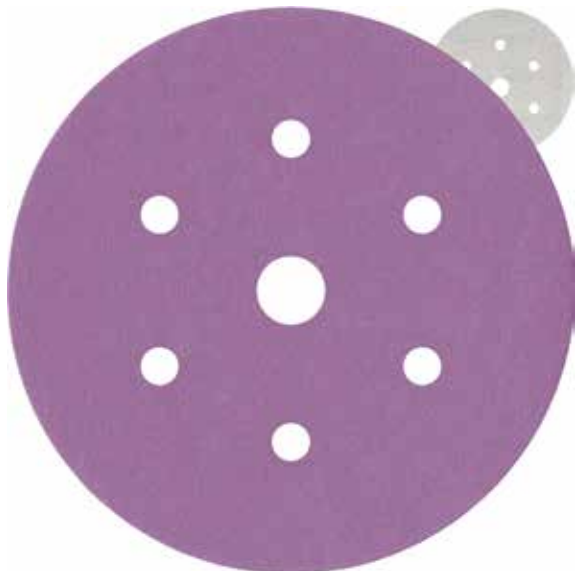

Purple Ceramic
Polyester Film Backing
Velcro Abrasive

Velcro Disc
CEPF1-V-D


Ideal for sanding various types of surfaces in metal industries. Polyester film backing with semi-open coated Ceramic abrasive, also with friction and heat resistant special Top Size coating. Ideal for sanding stainless steel and high alloy steel materials. Suitable for dry and wet applications. Tear resistant. Can be produced with the required dimensions.

Technical Data

| | | |
|--------------------------------|---|--|
| Product Code : CEPF1-V-D | Version : Standard | App. Area : Stainless Steel and High Alloy Steel Materials |
| Abrasive : Ceramic | Dimension : Upon Request | Features : Suitable for Dry and Wet Applications, Friction and Heat Absorbant and Tear Resistant |
| Backing : Polyester Film | Grit Range : 40, 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 600 | |
| Coating : Semi-Open & Top Size | App. Method : Orbital Sander | |

| Type | Size | Grit | Product Code |
|----------|------|------|----------------------|
| No Holes | 115 | 40 | CEPF1-V-D-40-115-D0 |
| | 115 | 60 | CEPF1-V-D-60-115-D0 |
| | 115 | 80 | CEPF1-V-D-80-115-D0 |
| | 115 | 100 | CEPF1-V-D-100-115-D0 |
| | 115 | 120 | CEPF1-V-D-120-115-D0 |
| | 115 | 150 | CEPF1-V-D-150-115-D0 |
| | 115 | 180 | CEPF1-V-D-180-115-D0 |
| | 115 | 220 | CEPF1-V-D-220-115-D0 |
| | 115 | 240 | CEPF1-V-D-240-115-D0 |
| | 115 | 320 | CEPF1-V-D-320-115-D0 |
| | 115 | 400 | CEPF1-V-D-400-115-D0 |
| | 115 | 600 | CEPF1-V-D-600-115-D0 |
| | 125 | 40 | CEPF1-V-D-40-125-D0 |
| | 125 | 60 | CEPF1-V-D-60-125-D0 |
| | 125 | 80 | CEPF1-V-D-80-125-D0 |
| | 125 | 100 | CEPF1-V-D-100-125-D0 |
| | 125 | 120 | CEPF1-V-D-120-125-D0 |
| | 125 | 150 | CEPF1-V-D-150-125-D0 |
| | 125 | 180 | CEPF1-V-D-180-125-D0 |
| | 125 | 220 | CEPF1-V-D-220-125-D0 |
| | 125 | 240 | CEPF1-V-D-240-125-D0 |
| | 125 | 320 | CEPF1-V-D-320-125-D0 |
| | 125 | 400 | CEPF1-V-D-400-125-D0 |
| | 125 | 600 | CEPF1-V-D-600-125-D0 |

| Type | Size | Grit | Product Code |
|---------|------|------|----------------------|
| 7 Holes | 150 | 40 | CEPF1-V-D-40-150-D7 |
| | 150 | 60 | CEPF1-V-D-60-150-D7 |
| | 150 | 80 | CEPF1-V-D-80-150-D7 |
| | 150 | 100 | CEPF1-V-D-100-150-D7 |
| | 150 | 120 | CEPF1-V-D-120-150-D7 |
| | 150 | 150 | CEPF1-V-D-150-150-D7 |
| | 150 | 180 | CEPF1-V-D-180-150-D7 |
| | 150 | 220 | CEPF1-V-D-220-150-D7 |
| | 150 | 240 | CEPF1-V-D-240-150-D7 |
| | 150 | 320 | CEPF1-V-D-320-150-D7 |
| | 150 | 400 | CEPF1-V-D-400-150-D7 |
| | 150 | 600 | CEPF1-V-D-600-150-D7 |



7 Holes

Yellow Aluminum Oxide
Paper Backing
Velcro Abrasive

Velcro Jumbo
AC1-V-JB

Ideal for sanding undercoated, painted and varnished surfaces in wood, automotive, paint and marine sectors. C weight paper backing with open coated Aluminum Oxide abrasive, also with anti-clogging stearate coating which allows long lifetime and constant grinding.




Technical Data

| | | |
|----------------------------|---|---|
| Product Code : AC1-V-JB | Version : Standard | App. Method : Jumbo |
| Abrasive : Aluminium Oxide | Jumbo Width : 1380 mm | App. Area : Wood, Automotive, Paint, Marine Sectors |
| Backing : C Weight Paper | Grit Range : 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 500, 600, 800 | Features : Anti-Clogging |
| Coating : Open & Stearate | | |

| Product Code | Product Description |
|--------------|---|
| AC1-V-JB-60 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 60 |
| AC1-V-JB-80 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 80 |
| AC1-V-JB-100 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 100 |
| AC1-V-JB-120 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 120 |
| AC1-V-JB-150 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 150 |
| AC1-V-JB-180 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 180 |
| AC1-V-JB-220 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 220 |
| AC1-V-JB-240 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 240 |
| AC1-V-JB-280 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 280 |
| AC1-V-JB-320 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 320 |
| AC1-V-JB-400 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 400 |
| AC1-V-JB-500 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 500 |
| AC1-V-JB-600 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 600 |
| AC1-V-JB-800 | AC1 - Yellow Aluminum Oxide Paper Backing Velcro Abrasive - Jumbo (width: 1380 mm) - Grit 800 |



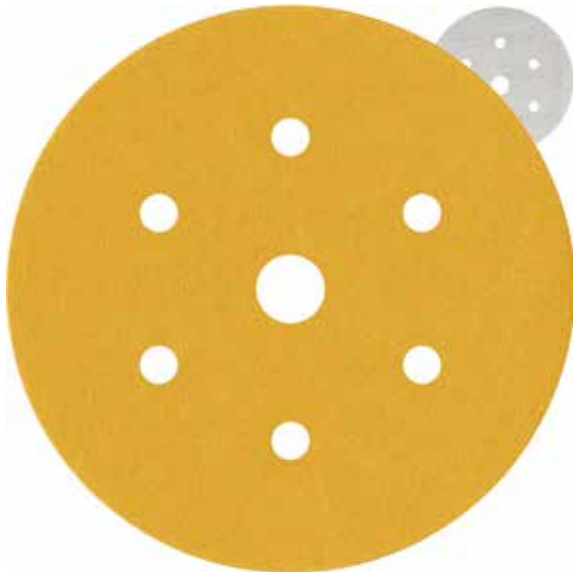

Yellow Aluminum Oxide
Paper Backing
Velcro Abrasive


Velcro Disc AC1-V-D

Ideal for sanding undercoated, painted and varnished surfaces in wood, automotive, paint and marine sectors. C weight paper backing with open coated Aluminum Oxide abrasive, also with anti-clogging Stearate coating which allows long lifetime and constant grinding. Can be produced with the required dimensions.

Technical Data

| | | |
|----------------------------|---|---|
| Product Code : AC1-V-D | Version : Standard | App. Method : Orbital Sander |
| Abrasive : Aluminium Oxide | Dimension : Upon Request | App. Area : Wood, Automotive, Paint, Marine Sectors |
| Backing : C Weight Paper | Grit Range : 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 500, 600, 800 | Features : Anti-Clogging |
| Coating : Open & Stearate | | |

| Type | Size | Grit | Product Code |
|------|------|------|--------------------|
| | 150 | 60 | AC1-V-D-60-150-D7 |
| | 150 | 80 | AC1-V-D-80-150-D7 |
| | 150 | 100 | AC1-V-D-100-150-D7 |
| | 150 | 120 | AC1-V-D-120-150-D7 |
| | 150 | 150 | AC1-V-D-150-150-D7 |
| | 150 | 180 | AC1-V-D-180-150-D7 |
| | 150 | 220 | AC1-V-D-220-150-D7 |
| | 150 | 240 | AC1-V-D-240-150-D7 |
| | 150 | 280 | AC1-V-D-280-150-D7 |
| | 150 | 320 | AC1-V-D-320-150-D7 |
| | 150 | 400 | AC1-V-D-400-150-D7 |
| | 150 | 500 | AC1-V-D-500-150-D7 |
| | 150 | 600 | AC1-V-D-600-150-D7 |
| | 150 | 800 | AC1-V-D-800-150-D7 |



7 Holes

Contact

Yurt's sales representatives and field engineers will dedicate their expertise to assisting with customers' inquiries. They will personally ensure that a solution is found promptly and to customers' full satisfaction. Customers can choose from the following options for getting in contact and stay connected.





Contact Us

contact@yurtglobal.com



Follow Us

 [/yurtglobal](https://www.facebook.com/yurtglobal)

 [/yurtglobal](https://www.instagram.com/yurtglobal)

 [/yurtglobal](https://www.linkedin.com/company/yurtglobal)



Visit Us

www.yurtglobal.com

A series of horizontal dashed lines for writing notes.

Innovative Industrial Solutions



Headquarters

Ikitelli OSB Mah. Isteks Sanayi Sitesi B3 Blok
No.12 34490 Basaksehir Istanbul / Turkiye
+90 532 3660193
contact@yurtglobal.com

Follow Us

 /yurtglobal
 /yurtglobal
 /yurtglobal