


## Y Polyester Cloth







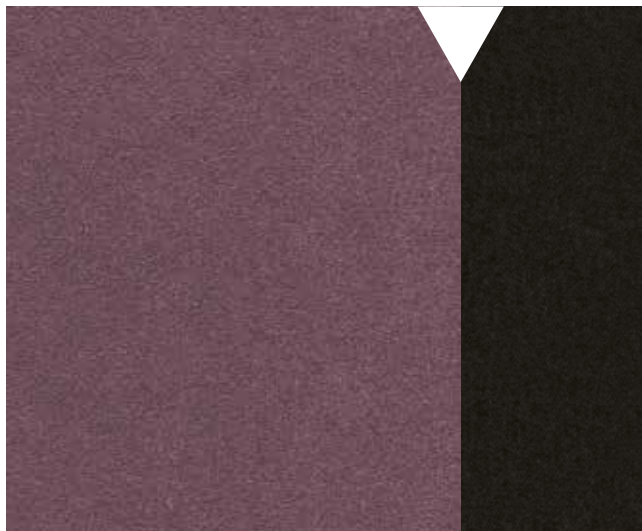


### RM862

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, brass, copper, non-ferrous metals, plastic, rubber, leather, glass, stone, granite, ceramic and wood in wide belts, narrow belts, rolls and velcro discs. Y polyester cloth backing with closed coated aggressive Aluminum Oxide abrasive. Suitable for wet applications.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RM862	Aluminum Oxide	Y Polyester Cloth	Closed	1420	36 - 1000

Grit Range																		
36	40	50	60	80	100	120	150	180	220	240	280	320	400	500	600	800	1000	

Product Forms				
 Jumbo	 Segmented Belt (Multi Joint)	 Wide Belt	 Narrow Belt	 Roll
 Disc	 Velcro Disc	 Flap Wheel	 Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant