



ENDLESS BELT  
SPLICING TAPES

# Company Profile

---

*Yurt, with its 30 years of experience in Innovative Industrial Solutions, cooperates with many leading global companies in its sector.*

*Providing service with its innovative products in the developing industrialization and ever-expanding industrial solutions market, Yurt has built all its processes on meeting the needs and expectations of its customers with high performance.*

*Based in Turkey, Yurt is a global player operating in many markets, primarily in Europe.*

*Since the founding of the company in 2010, Yurt has gained a good place in the abrasive industry by launching numerous new products.*

## **Our Vision**

*To increase customer satisfaction and loyalty by offering our innovative products with superior performance and quality in the industrial solutions sector,*

*To become a highly preferred international brand by continuously increasing our global market share by making a difference in competitive power,*

*To maintain by increasing the importance and value we attach to sustainability, environmental awareness, human safety and education.*





## Innovative

---

Yurt maintains its place as leader in the sector by anticipating its customers's requirements to create innovative technologies. Finding new solutions to help customers improve their industrial processes drives the company's everyday decisions.



## Industrial

---

Focusing on superior technology and customer support, Yurt is one of the top suppliers in the global abrasive industry. Having a worldwide network, company have operations, not only in Europe, but also in various important global bases.



## Solutions

---

As the leader in the abrasive industry, Yurt does not only offer products to its customers, it offers solutions that are tailored to individual customer requirements. Yurt provides added value abrasive solutions generated as a result of innovative ideas that aim to revolutionise abrasive industry.





# Endless Belt Splicing Tapes

---


*Sheldahl created a perfect solution over 40 years ago when it patented the Sheldahl brand unidirectional splicing system. This system combines tape, adhesive, curative, and your belt material, optimized for high-performance and cost-effectiveness. Sanding, abrasive grinding, and polishing belts run at accelerated speeds, creating high temperatures during operation.*

*Dependable tapes are required for bonding the two sides of the endless belts together to keep them from operational malfunctions. Unidirectional tapes are a cost-effective and durable solution that increases the lifecycle of abrasive belts.*

## Technical Table

Product Name	Colour	Product Code	Tape Thickness (max.) (mm)	Tensile Strength (min.) (N/cm)	Technical Details	Grit Range
<b>Pink</b>		<b>T1880</b>	0,094	290	Thin, highest flex	120+
<b>Blue</b>		<b>T1884</b>	0,185	542	High tensile along with good flex	40-100
<b>White</b>		<b>T1882</b>	0,145	402	Versatile combination of flex and strength	60-120
<b>Pearl White</b>		<b>T9071</b>	0,152	490	Versatile, superior strength and flex, rougher surface	60-120
<b>Yellow</b>		<b>T1930</b>	0,069	175	Ultra thin, for finest grit applications	320+
<b>Green</b>		<b>T1886</b>	0,239	595	Highest strength, strong abrasion and hinge resistance	16-60
<b>Fabric</b>		<b>T1878</b>	0,178	420	Flexible, in air tools with non-woven applications for surface conditioning	All

## Technical Comparison

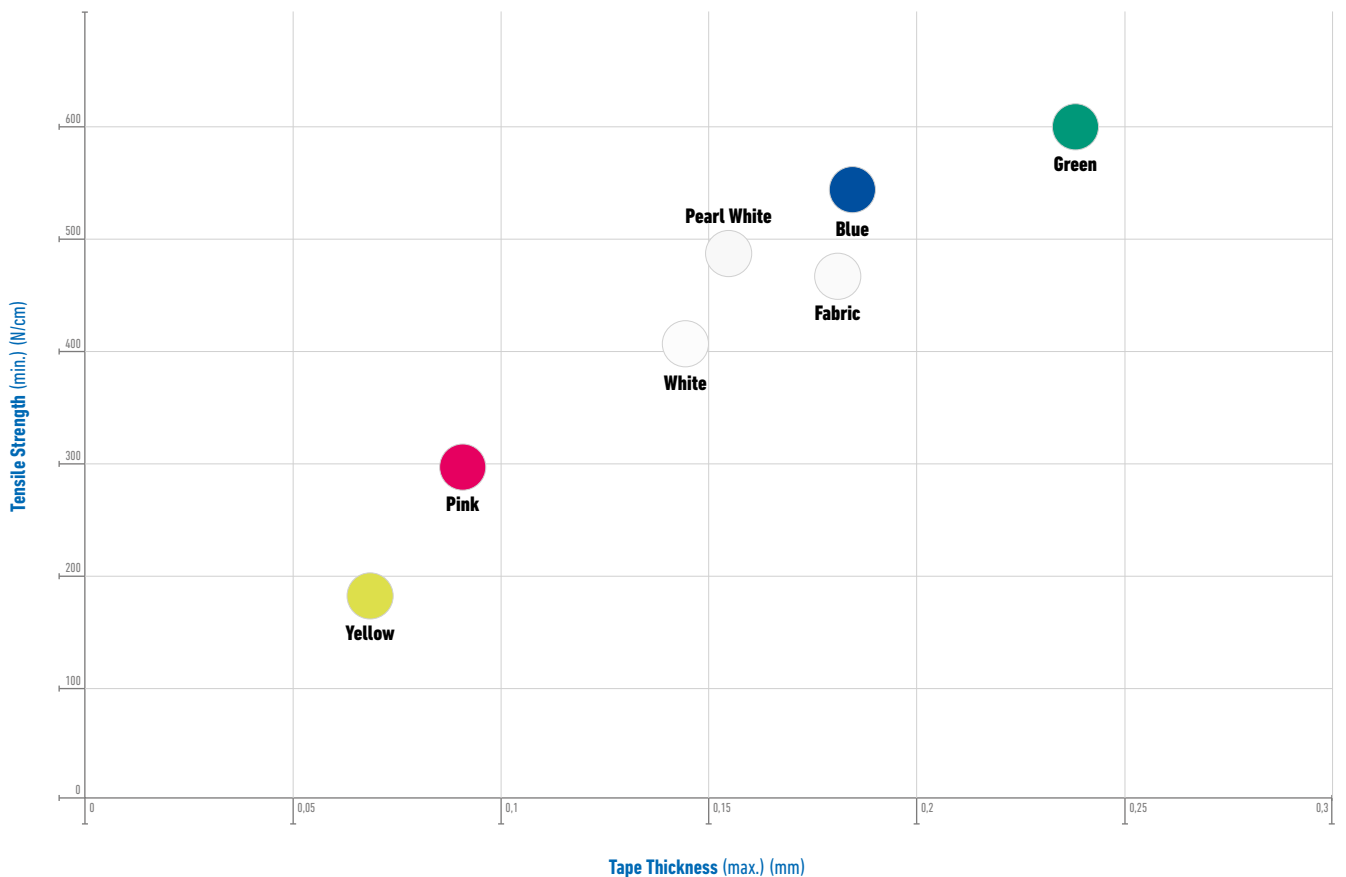

Sheldahl

# Pink T1880

Thin, highest flex.





## Technical Data

Product Name : *Pink*  
 Product Code : *T1880*  
 Tape Thickness : *Max. 0,094 mm*  
 Tensile Strength : *Min. 290 N/cm*

Technical Details : *Thin, highest flex*  
 Grit Range : *120+*

Product Name / Code	Angle	Width (mm)	Roll Length (m)	Article No.	Product Description
Pink / T1880	67°	19	200	148572-508	Pink, 67°, 19 mm, 200 Meters
		19	100	148572-501	Pink, 67°, 19 mm, 100 Meters
		16	100	148572-506	Pink, 67°, 16 mm, 100 Meters
		25.4	100	148572-502	Pink, 67°, 25.4 mm, 100 Meters
	75°	19	100	148575-505	Pink, 75°, 19 mm, 100 Meters
		19	200	148575-504	Pink, 75°, 19 mm, 200 Meters
		16	100	148575-508	Pink, 75°, 16 mm, 100 Meters
		10	100	148575-507	Pink, 75°, 10 mm, 100 Meters
		25.4	100	148575-503	Pink, 75°, 25.4 mm, 100 Meters
	55°	19	200	148570-505	Pink, 55°, 19 mm, 200 Meters
		19	100	148570-501	Pink, 55°, 19 mm, 100 Meters
	80°	19	200	148576-504	Pink, 80°, 19 mm, 100 Meters
	45°	19	100	148569-502	Pink, 45°, 19 mm, 100 Meters
	67R°	19	100	148566-501	Pink, 67°, Reverse Angle, 19 mm, 100 Meters
		25.4	100	148566-502	Pink, 67°, Reverse Angle, 25.4 mm, 100 Meters
	75R°	19	100	148567-501	Pink, 75°, Reverse Angle, 19 mm, 100 Meters

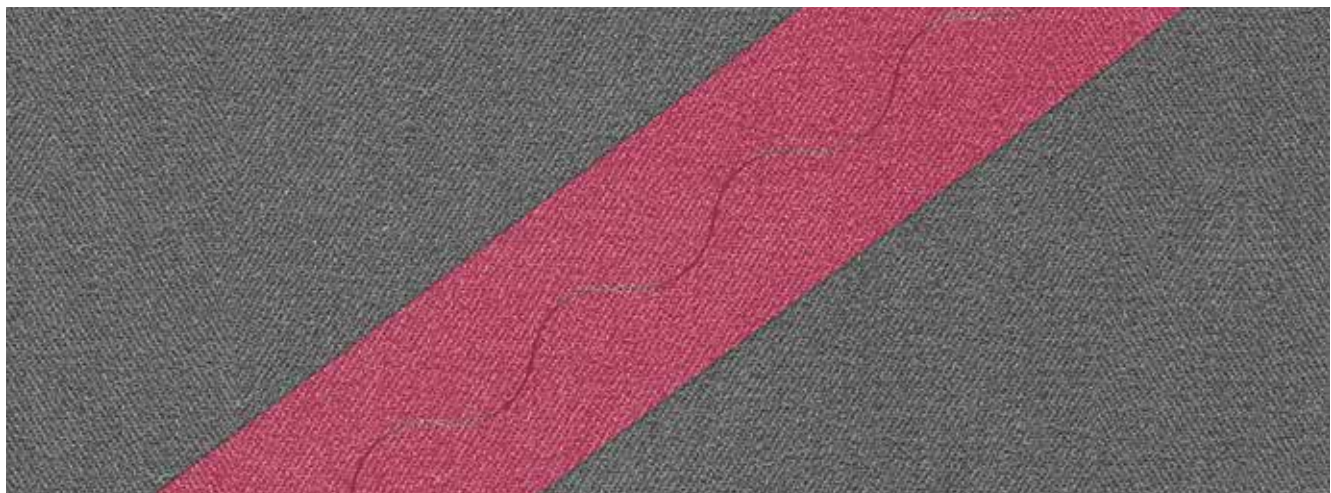

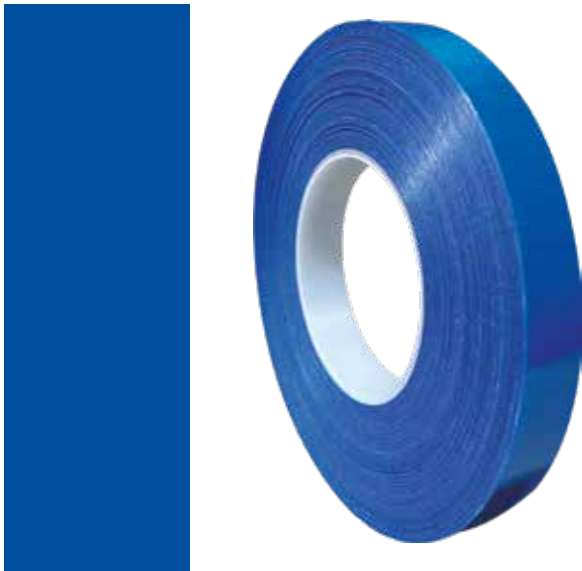

Sheldahl

## Blue T1884

High tensile along with good flex.

### Technical Data

Product Name : Blue  
 Product Code : T1884  
 Tape Thickness : Max. 0,185 mm  
 Tensile Strength : Min. 542 N/cm

Technical Details : High tensile along with good flex  
 Grit Range : 40-100  
 Features : High Flexibility

Product Name / Code	Angle	Width (mm)	Roll Length (m)	Article No.	Product Description
Blue / T1884	67°	19	100	174631-502	Blue, 67°, 19 mm, 100 Meters
		19	200	174631-522	Blue, 67°, 19 mm, 200 Meters
		25	100	174631-505	Blue, 67°, 25.4 mm, 100 Meters
	75°	19	100	175129-504	Blue, 75°, 19 mm, 100 Meters
		19	200	175129-503	Blue, 75°, 19 mm, 200 Meters
		16	100	175129-502	Blue, 75°, 16 mm, 100 Meters
		10	100	175129-508	Blue, 75°, 10 mm, 100 Meters
	55°	25.4	100	175129-507	Blue, 75°, 25.4 mm, 100 Meters
		19	100	174632-502	Blue, 55°, 19 mm, 100 Meters
		25.4	100	174632-503	Blue, 55°, 25.4 mm, 100 Meters
	80°	19	100	177887-502	Blue, 80°, 19 mm, 100 Meters
	90°	19	100	178571-502	Blue, 90°, 19 mm, 100 Meters
	45°	19	100	177882-502	Blue, 45°, 19 mm, 100 Meters
	67R°	19	100	175902-502	Blue, 67°, Reverse Angle, 19 mm, 100 Meters
		25.4	100	175902-503	Blue, 67°, Reverse Angle, 25.4 mm, 100 Meters
	75R°	19	100	175217-505	Blue, 75°, Reverse Angle, 19 mm, 100 Meters
		25.4	100	175217-503	Blue, 75°, Reverse Angle, 25.4 mm, 100 Meters
80R°	19	100	148598-502	Blue, 80°, Reverse Angle, 19 mm, 100 Meters	



Sheldahl

## White T1882

Versatile combination of flex and strength.



### Technical Data

Product Name : White  
 Product Code : T1882  
 Tape Thickness : Max. 0,145 mm  
 Tensile Strength : Min. 402 N/cm

Technical Details : Versatile combination of flex and strength  
 Grit Range : 60-120  
 Features : High Versatility

Product Name / Code	Angle	Width (mm)	Roll Length (m)	Article No.	Product Description
White / T1882	67°	19	100	148587-501	White, 67°, 19 mm, 100 Meters
		19	200	148587-509	White, 67°, 19 mm, 200 Meters
		16	100	148587-511	White, 67°, 16 mm, 100 Meters
		25.4	100	148587-502	White, 67°, 25.4 mm, 100 Meters
	67R°	19	100	148581-501	White, 67°, Reverse Angle, 19 mm, 100 Meters
		25.4	100	148581-508	White, 67°, Reverse Angle, 25.4 mm, 100 Meters
	75°	19	100	148590-507	White, 75°, 19 mm, 100 Meters
		19	200	148590-504	White, 75°, 19 mm, 200 Meters
		16	100	148590-506	White, 75°, 16 mm, 100 Meters
		25.4	100	148590-508	White, 75°, 25.4 mm, 100 Meters
	75R°	19	100	148582-501	White, 75° Reverse Angle, 19 mm, 100 Meters
		25.4	100	148582-502	White, 75°, Reverse Angle, 25.4 mm, 100 Meters
	80°	19	100	148591-501	White, 80°, 19 mm, 100 Meters
	80R°	19	100	188965-502	White, 80°, Reverse Angle, 19 mm, 100 Meters
	55°	19	100	148585-501	White, 55°, 19 mm, 100 Meters
		25.4	100	148585-502	White, 55°, 25.4 mm, 100 Meters
45°	19	100	148584-501	White, 45°, 19 mm, 100 Meters	







Sheldahl

## Pearl White T9071


Versatile, superior strength and flex, rougher surface.

### Technical Data

Product Name : Pearl White  
 Product Code : T9071  
 Tape Thickness : Max. 0,152 mm  
 Tensile Strength : Min. 490 N/cm

Technical Details : Superior strength and flex, rougher surface  
 Grit Range : 60-120  
 Features : High versatility


Product Name / Code	Angle	Width (mm)	Roll Length (m)	Article No.	Product Description
Pearl White / T9071	67°	19	100	189383-502	Pearl White, 67°, 19 mm, 100 Meters
		19	200	189383-522	Pearl White, 67°, 19 mm, 200 Meters
		25.4	100	189383-503	Pearl White, 67°, 25.4 mm, 100 Meters
	75°	19	100	189381-502	Pearl White, 75°, 19 mm, 100 Meters
		16	100	189381-505	Pearl White, 75°, 16 mm, 100 Meters
		25	100	189381-503	Pearl White, 75°, 25 mm, 100 Meters
	75R°	19	100	189384-502	Pearl White, 75°, Reverse Angle, 19 mm, 100 Meters

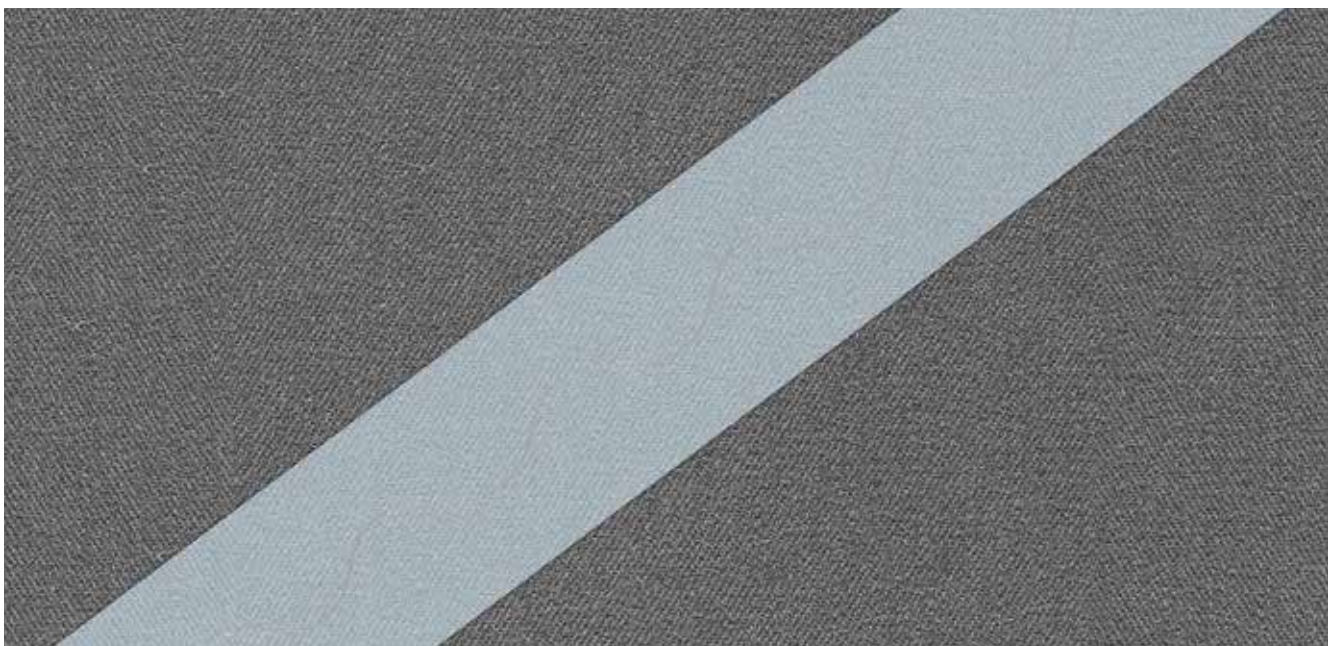

Sheldahl

## Green T1886

Highest strength, strong abrasion and hinge resistance.




### Technical Data

Product Name : Green  
 Product Code : T1886  
 Tape Thickness : Max. 0,239 mm  
 Tensile Strength : Min. 595 N/cm

Technical Details : Highest strength, strong abrasion and hinge resistance  
 Grit Range : 16-60

Product Name / Code	Angle	Width (mm)	Roll Length (m)	Article No.	Product Description
Green / T1886	67°	19	100	175868-502	Green, 67°, 19 mm, 100 Meters
		25.4	100	175868-503	Green, 67°, 25.4 mm, 100 Meters
	75°	19	100	177888-502	Green, 75°, 19 mm, 100 Meters
		16	100	177888-504	Green, 75°, 16 mm, 100 Meters
		25.4	100	177888-503	Green, 75°, 25.4 mm, 100 Meters
	67R°	19	100	178420-002	Green, 67°, Reverse Angle, 19 mm, 100 Meters
25.4		100	178420-503	Green, 67°, Reverse Angle, 25.4 mm, 100 Meters	

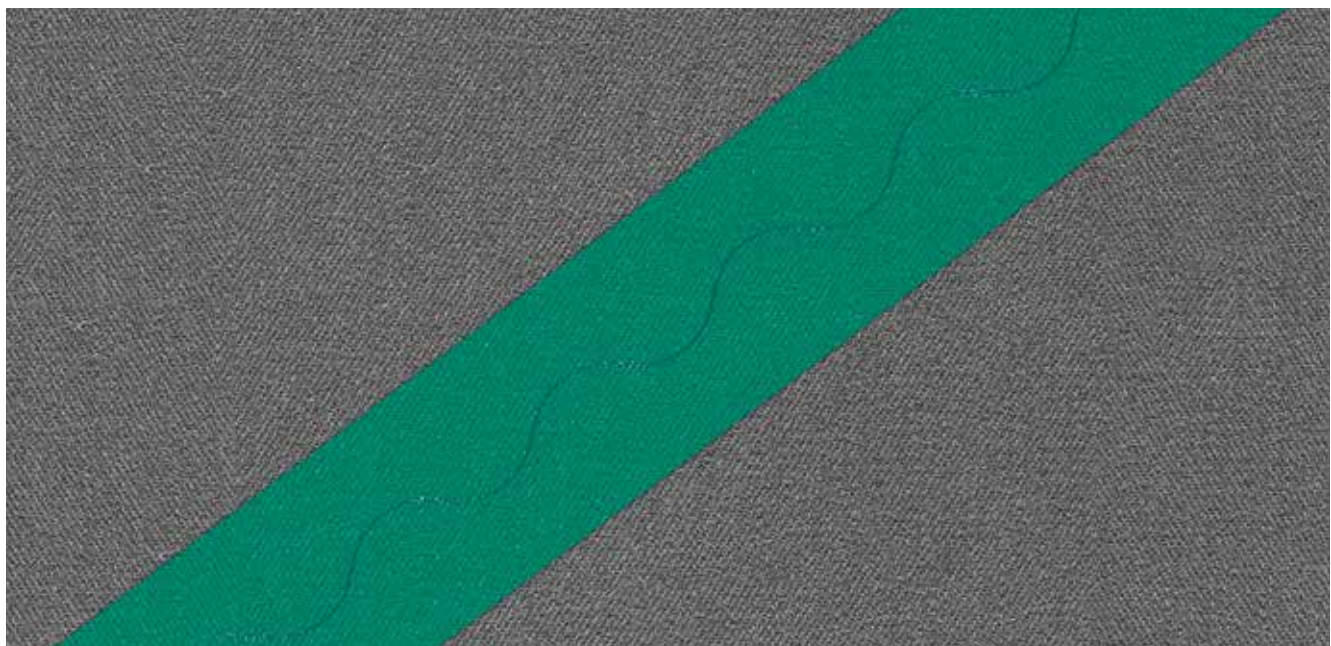



Sheldahl

## Yellow T1930


Ultra thin, for finest grit applications.

### Technical Data

Product Name : **Yellow**  
 Product Code : **T1930**  
 Tape Thickness : **Max. 0,069 mm**  
 Tensile Strength : **Min. 175 N/cm**

Technical Details : **Ultra thin, for finest grit applications**  
 Grit Range : **320+**

Product Name / Code	Angle	Width (mm)	Roll Length (m)	Article No.	Product Description
Yellow / T1930	67°	19	100	177888-506	Yellow, 67°, 19 mm, 100 Meters
		25.4	100	148681-002	Yellow, 67°, 25.4 mm, 100 Meters
	75°	19	100	148682-501	Yellow, 75°, 19 mm, 100 Meters
		25	100	148682-002	Yellow, 75°, 25 mm, 100 Meters

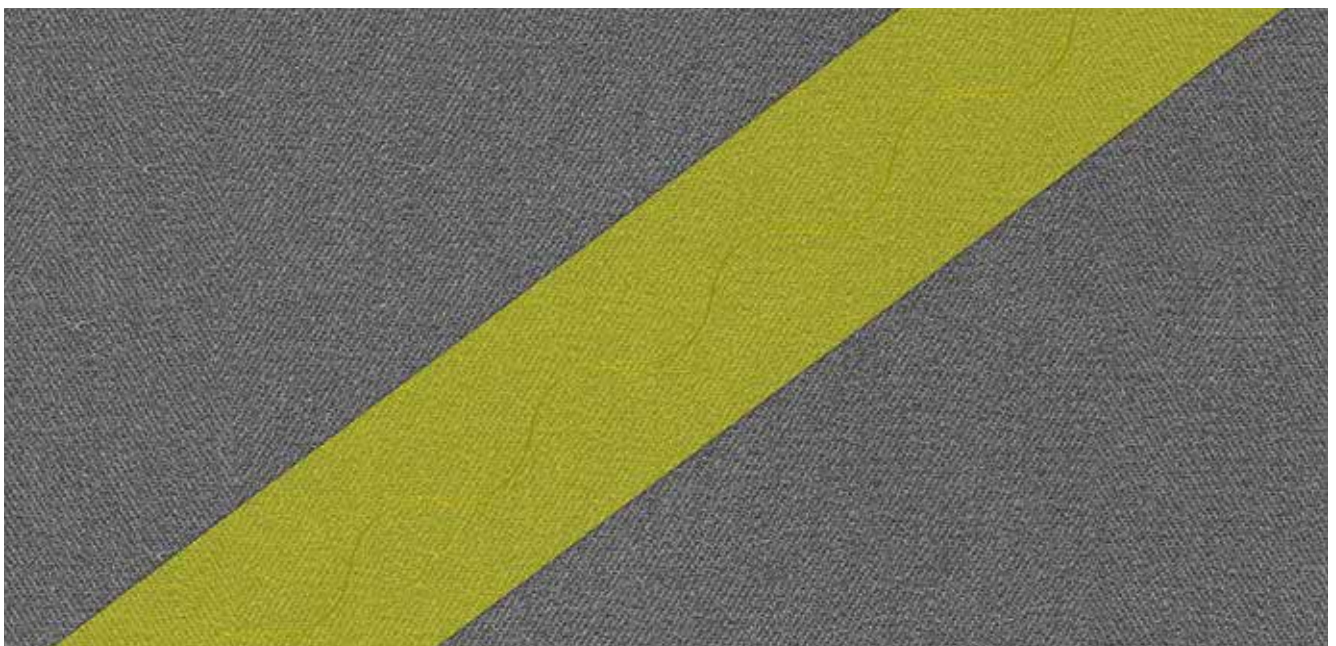

Sheldahl

## Fabric T1878

Flexible, in air tools with non-woven applications for surface conditioning.




### Technical Data

Product Name : Fabric  
 Product Code : T1878  
 Tape Thickness : Max. 0,178 mm  
 Tensile Strength : Min. 420 N/cm

Technical Details : Flexible, in air tools with non-woven applications for surface conditioning  
 Grit Range : All

Product Name / Code	Angle	Width (mm)	Roll Length (m)	Article No.	Product Description
Fabric / T1878	67°	19	100	162936-502	Fabric, 67°, 19 mm, 100 Meters
		25.4	100	162936-503	Fabric, 67°, 25.4 mm, 100 Meters
		38.1	100	162936-506	Fabric, 67°, 38.1 mm, 100 Meters
	75°	19	100	163075-502	Fabric, 75°, 19 mm, 100 Meters
		19	200	163075-522	Fabric, 75°, 19 mm, 200 Meters
		25.4	100	163075-503	Fabric, 75°, 25.4 mm, 100 Meters
	55°	19	100	165921-502	Fabric, 55°, 19 mm, 100 Meters

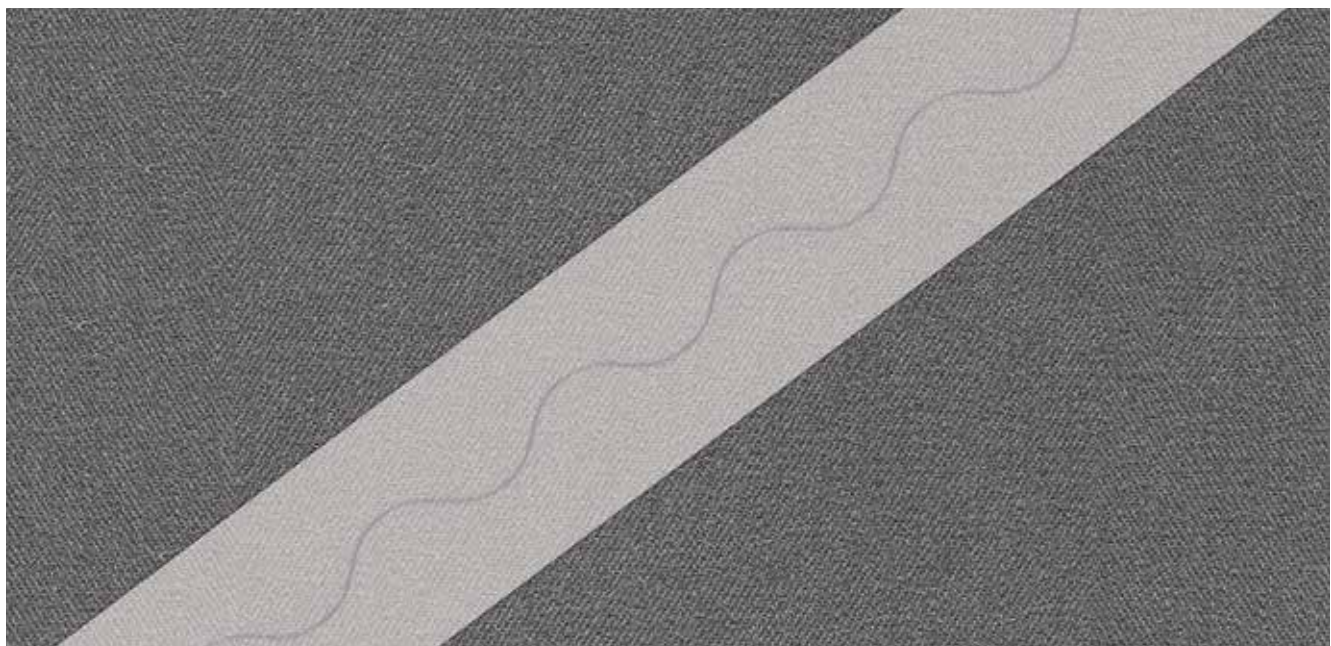






# *Innovative Industrial Solutions*



## Headquarters

İkitelli OSB Mah. İsteks San. Sitesi B2 Blok No:  
22 34490 Başakşehir, İstanbul / Türkiye  
+90 212 485 32 69  
contact@yurtglobal.com

## Follow Us

 /yurtglobal  
 /yurtglobal  
 /yurtglobal