


Product Data Sheet







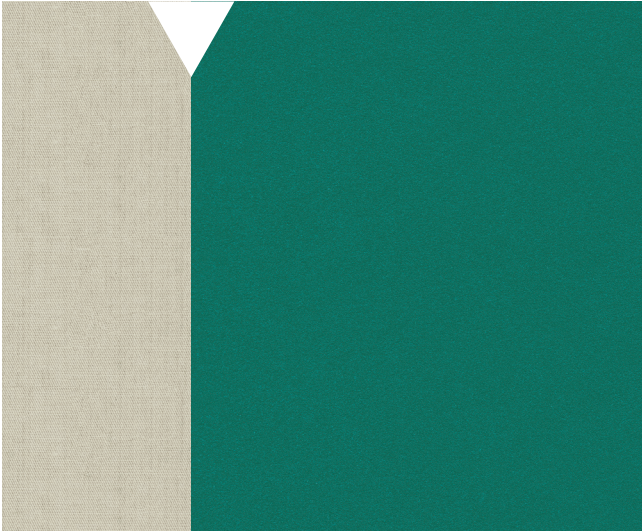




J Flexible Polycotton Cloth

RG739

Ideal for sanding stainless steel, high alloy steel, heat resistant steel, cast iron, aluminum, zamak, brass, copper, non-ferrous steels, plastic, rubber, leather in narrow belts and rolls. J flexible poly-cotton cloth backing with 100% Ceramic abrasive, also with friction and heat resistant Topsize coating. Long service lifetime.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RG739	100% Ceramic	J Flexible Polycotton Cloth	Topsize & Closed	1400	60 - 400

Grit Range																	
				60	80	100	120	150	180	220	240	280	320	400			

Product Forms				
 Jumbo	 Segmented Belt (Multi Joint)	 Wide Belt	 Narrow Belt	 Roll
 Disc	 Velcro Disc	 Flap Wheel	 Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant