


Product Data Sheet







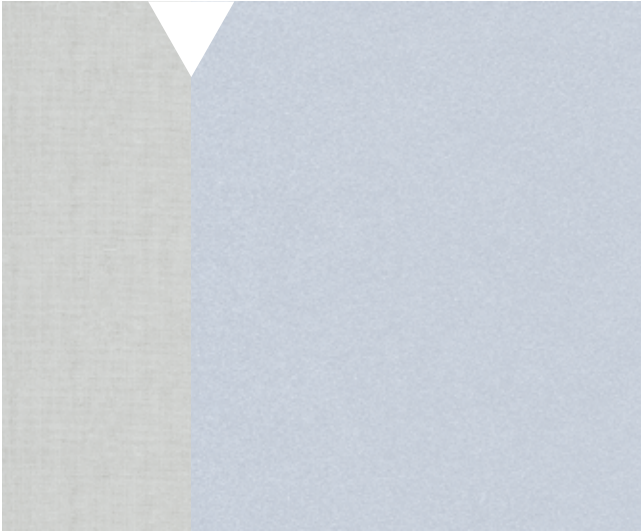




J Flexible Polycotton Cloth

RC781S

Ideal for sanding brass, copper, non-ferrous steels, aluminum, zamak, plastic, rubber, leather, glass, stone, granite, ceramic, wood, low alloy steel and stainless steel materials in narrow belt sand rolls. Light weight J flexible poly-cotton cloth backing with Silicon Carbide abrasive. Also has Stearate coating for anti-clogging feature. Flexible structure, ideal for polishing hardware sanitary.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RC781S	Silicon Carbide	J Flexible Polycotton Cloth	Stearate & Closed	1400	60 - 1000

Grit Range																		
				60	80	100	120	150	180	220	240	280	320	400	500	600	800	1000

Product Forms				
 Jumbo	 Segmented Belt (Multi Joint)	 Wide Belt	 Narrow Belt	 Roll
 Disc	 Velcro Disc	 Flap Wheel	 Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant