

ABRASIVE BELTS & ROLLS



Company Profile

Yurt, with its experience in Innovative Industrial Solutions, cooperates with many leading global companies in its sector.

Providing service with its innovative products in the developing industrialization and ever-expanding industrial solutions market, Yurt has built all its processes on meeting the needs and expectations of its customers with high performance.

Based in Turkey, Yurt is a global player operating in many markets, primarily in Europe.

Since the founding of the company in 2010, Yurt has gained a good place in the abrasive industry by launching numerous new products.

Our Vision

To increase customer satisfaction and loyalty by offering our innovative products with superior performance and quality in the industrial solutions sector,

To become a highly preferred international brand by continuously increasing our global market share by making a difference in competitive power,

To maintain by increasing the importance and value we attach to sustainability, environmental awareness, human safety and education.





Innovative

Yurt maintains its place as leader in the sector by anticipating its customers's requirements to create innovative technologies. Finding new solutions to help customers improve their industrial processes drives the company's everyday decisions.



Industrial

Focusing on superior technology and customer support, Yurt is one of the top suppliers in the global abrasive industry. Having a worldwide network, company have operations, not only in Europe, but also in various important global bases.



Solutions

As the leader in the abrasive industry, Yurt does not only offer products to its customers, it offers solutions that are tailored to individual customer requirements. Yurt provides added value abrasive solutions generated as a result of innovative ideas that aim to revolutionise abrasive industry.

Abrasive Belts & Rolls

White Dove manufactures various coated abrasives used in various industrial applications. White Dove is one of the biggest manufacturers in the world, supplying coated abrasives for all Global Abrasive Market.



Technical Table

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range	Grit Range																		
						24	36	40	50	60	80	100	120	150	180	220	240	280	320	400	500	600	800	1000
PEK41	Aluminum Oxide	E Weight Paper	Closed	1400	40 - 1000			●	○	●	●	●	●	●	●	○	●	○	●	●	○	○	○	
PEC51	Silicon Carbide		Antistatic & Closed	1650	40 - 1000			○	○	●	●	●	●	●	●	○	●	○	●	●	○	●	○	○
RS736	Aluminum Oxide	J Flexible Polycotton Cloth	Closed	1400	60 - 320					●	●	●	●	●	●	●	●	●						
RS737	Aluminum Oxide		Stearate & Closed	1400	60 - 1000				○	●	●	●	●	●	○	●	○	●	●	○	●	○	○	
RC781	Silicon Carbide		Closed	1400	60 - 1000				○	●	●	●	●	●	○	●	○	●	●	○	●	○	○	
RZ739	Zirconia		Closed	1400	60 - 220					●	●	●	●	●	●	●								
RG739	100% Ceramic		Topsize & Closed	1400	60 - 150					●	●	●	●	●										
GXK51	Aluminum Oxide		X Cotton Cloth	Closed	1400	40 - 400			●	○	●	●	●	●	●	●	●	●	●	●				
GM775	Aluminum Oxide	X Polycotton Cloth	Closed	1400	40 - 80			●		●	●													
GZ777	Zirconia		Closed	1400	40 - 120			●		●	●	●												
RM862	Aluminum Oxide	Y Polyester Cloth	Closed	1420	40 - 240			●		●	●	●	●	●	●	●	●							
RC851	Silicon Carbide		Closed	1400	36 - 400		○	●	●	●	●	●	●	●	○	○	○	○	○					
RC861	Silicon Carbide		Antistatic & Closed	1400	36 - 400		○	●	●	●	●	●	●	●	○	○	○	○	○					
RC881	Silicon Carbide		Antistatic & Closed	1650	36 - 220		●	●	●	●	●	●	●	●	●									
RZ865	Zirconia		Closed	1400	60 - 180			●	●	●	●	●	●	●										
RZ777	100% Zirconia		Semi Open	1450	24 - 120	●	●	●	○	●	●	●	●											
RZ873	100% Zirconia		Closed	1420	24 - 120	○	○	●	○	●	●	●	●											
RG865	Ceramic		Closed	1420	40 - 400			○	○	●	●	●	●	●	●	○	○	○	○	○				
RG865S	Ceramic		Topsize & Closed	1420	40 - 150			●	○	●	●	●	●	●										
RG996	100% Ceramic		Closed	1650	60 - 120					●	●	●	●											
RCK71	Compact Aluminum Oxide	Z Polyester Cloth	Semi Open	1420	80 - 1200						●	○	●	○	●	○	●	○	●	●	○	○	○	
RCK81	Compact Aluminum Oxide		Semi Open	1420	80 - 1200						●	○	●	○	○	○	●	○	●	●	○	○	○	
RCC71	Compact Silicon Carbide		Semi Open	1400	80 - 1200						○	○	●	○	●	○	○	○	●	○	○	○	○	
RCC81	Compact Silicon Carbide		Semi Open	1400	80 - 1200						○	○	●	○	●	○	○	○	○	●	○	○	○	
RC85Y	Silicon Carbide (Cork)		Semi Open	1400	240 - 1200												●		●	●		●	●	
RZ877	100% Zirconia		Topsize & Closed	1420	24 - 120	●	●	●	○	●	●	●	●											
RZ887	100% Zirconia		Topsize & Closed Epoxy Resine	1420	24 - 120	●	●	●	○	●	●	●	●											
RG997	Ceramic & Zirconia	Topsize & Closed	1420	24 - 120	○	●	●	○	●	●	○	●												
RG998	100% Ceramic	Topsize & Closed	1410	24 - 120	●	●	●	○	●	●	●	●												

●	●	●	●	

Product Forms									Application Areas										Features						
Jumbo	Segmented Belt (Multi-Joint)	Wide Belt	Narrow Belt	Roll	Disc	Velcro Disc	Flap Wheel	Flap Disc	Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox	High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer	Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)	Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant
•	•	•	•	•	•	•			•		•	•				•	•								
•	•	•	•	•	•	•			•					•	•		•		•	•					
•				•	•		•				•	•	•	•										•	
•			•	•							•	•	•	•									•	•	
•			•	•					•		•	•		•	•		•		•					•	
•			•	•							•	•	•	•										•	
•			•	•	•	•	•		•	•	•	•		•	•	•	•	•	•	•				•	
•			•	•				•	•		•	•	•	•										•	
•			•	•					•		•	•	•	•			•	•		•				•	
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•		•			•
•		•	•	•	•	•			•	•	•	•		•	•		•	•		•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					•
•		•	•	•	•	•			•	•	•	•	•	•	•		•	•	•	•					

E Weight Paper










PEK41

Ideal for sanding wood, low alloy steel, stainless steel, plastic, rubber, leather, paint, varnish, lacquer in wide belts narrow belts, rolls, discs and velcro discs. E weight paper and with resined over glue closed coated Aluminum Oxide abrasive.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
PEK41	Aluminum Oxide	E Weight Paper	Closed	1400	40 - 1000

Grit Range																			
		40	50	60	80	100	120	150	180	220	240	280	320	400	500	600	800	1000	

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant












E Weight Paper

PEC51

Ideal for sanding wood, aluminum, zamak, brass, copper, non-ferrous metals, plastic, rubber, leather, glass, stone, granite, ceramic in wide belts, rolls, discs and velcro discs. Antistatic E weight paper and also antistatic coating (which prevents the sticking of dust) with resin over resin closed coated Silicon Carbide abrasive.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
PEC51	Silicon Carbide	E Weight Paper	Antistatic & Closed	1650	40 - 1000

Grit Range																		
		40	50	60	80	100	120	150	180	220	240	280	320	400	500	600	800	1000

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

J Flexible Polycotton Cloth










RS736

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum and zamak in narrow belts, rolls and flap wheels. J flexible poly-cotton cloth backing with closed coated Aluminum Oxide abrasive. Flexible structure, ideal for polishing.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RS736	Aluminum Oxide	J Flexible Polycotton Cloth	Closed	1400	60 - 320

Grit Range																			
				60	80	100	120	150	180	220	240	280	320						

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant












J Flexible Polycotton Cloth

RS737

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum and zamak in narrow belts and rolls. J flexible poly-cotton cloth backing with closed coated Aluminum Oxide abrasive. Also has Stearate coating for anti-clogging feature. Flexible structure, ideal for polishing.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RS737	Aluminum Oxide	J Flexible Polycotton Cloth	Stearate & Closed	1400	60 - 1000

Grit Range																			
				60	80	100	120	150	180	220	240	280	320	400	500	600	800	1000	

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	


Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

J Flexible Polycotton Cloth





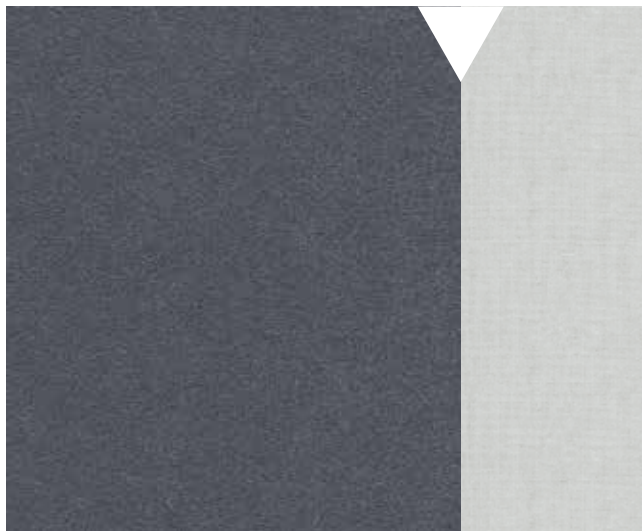




RC781

Ideal for sanding brass, copper, non-ferrous steel, aluminum, zamak, plastic, rubber, leather, glass, stone, granite, ceramic, wood, low alloy steel and stainless steel materials in narrow belt sand rolls. Light weight J flexible poly-cotton cloth backing with Silicon Carbide abrasive. Flexible structure, ideal for polishing hardware sanitary.




Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RC781	Silicon Carbide	J Flexible Polycotton Cloth	Closed	1400	60 - 1000

Grit Range																		
				60	80	100	120	150	180	220	240	280	320	400	500	600	800	1000

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

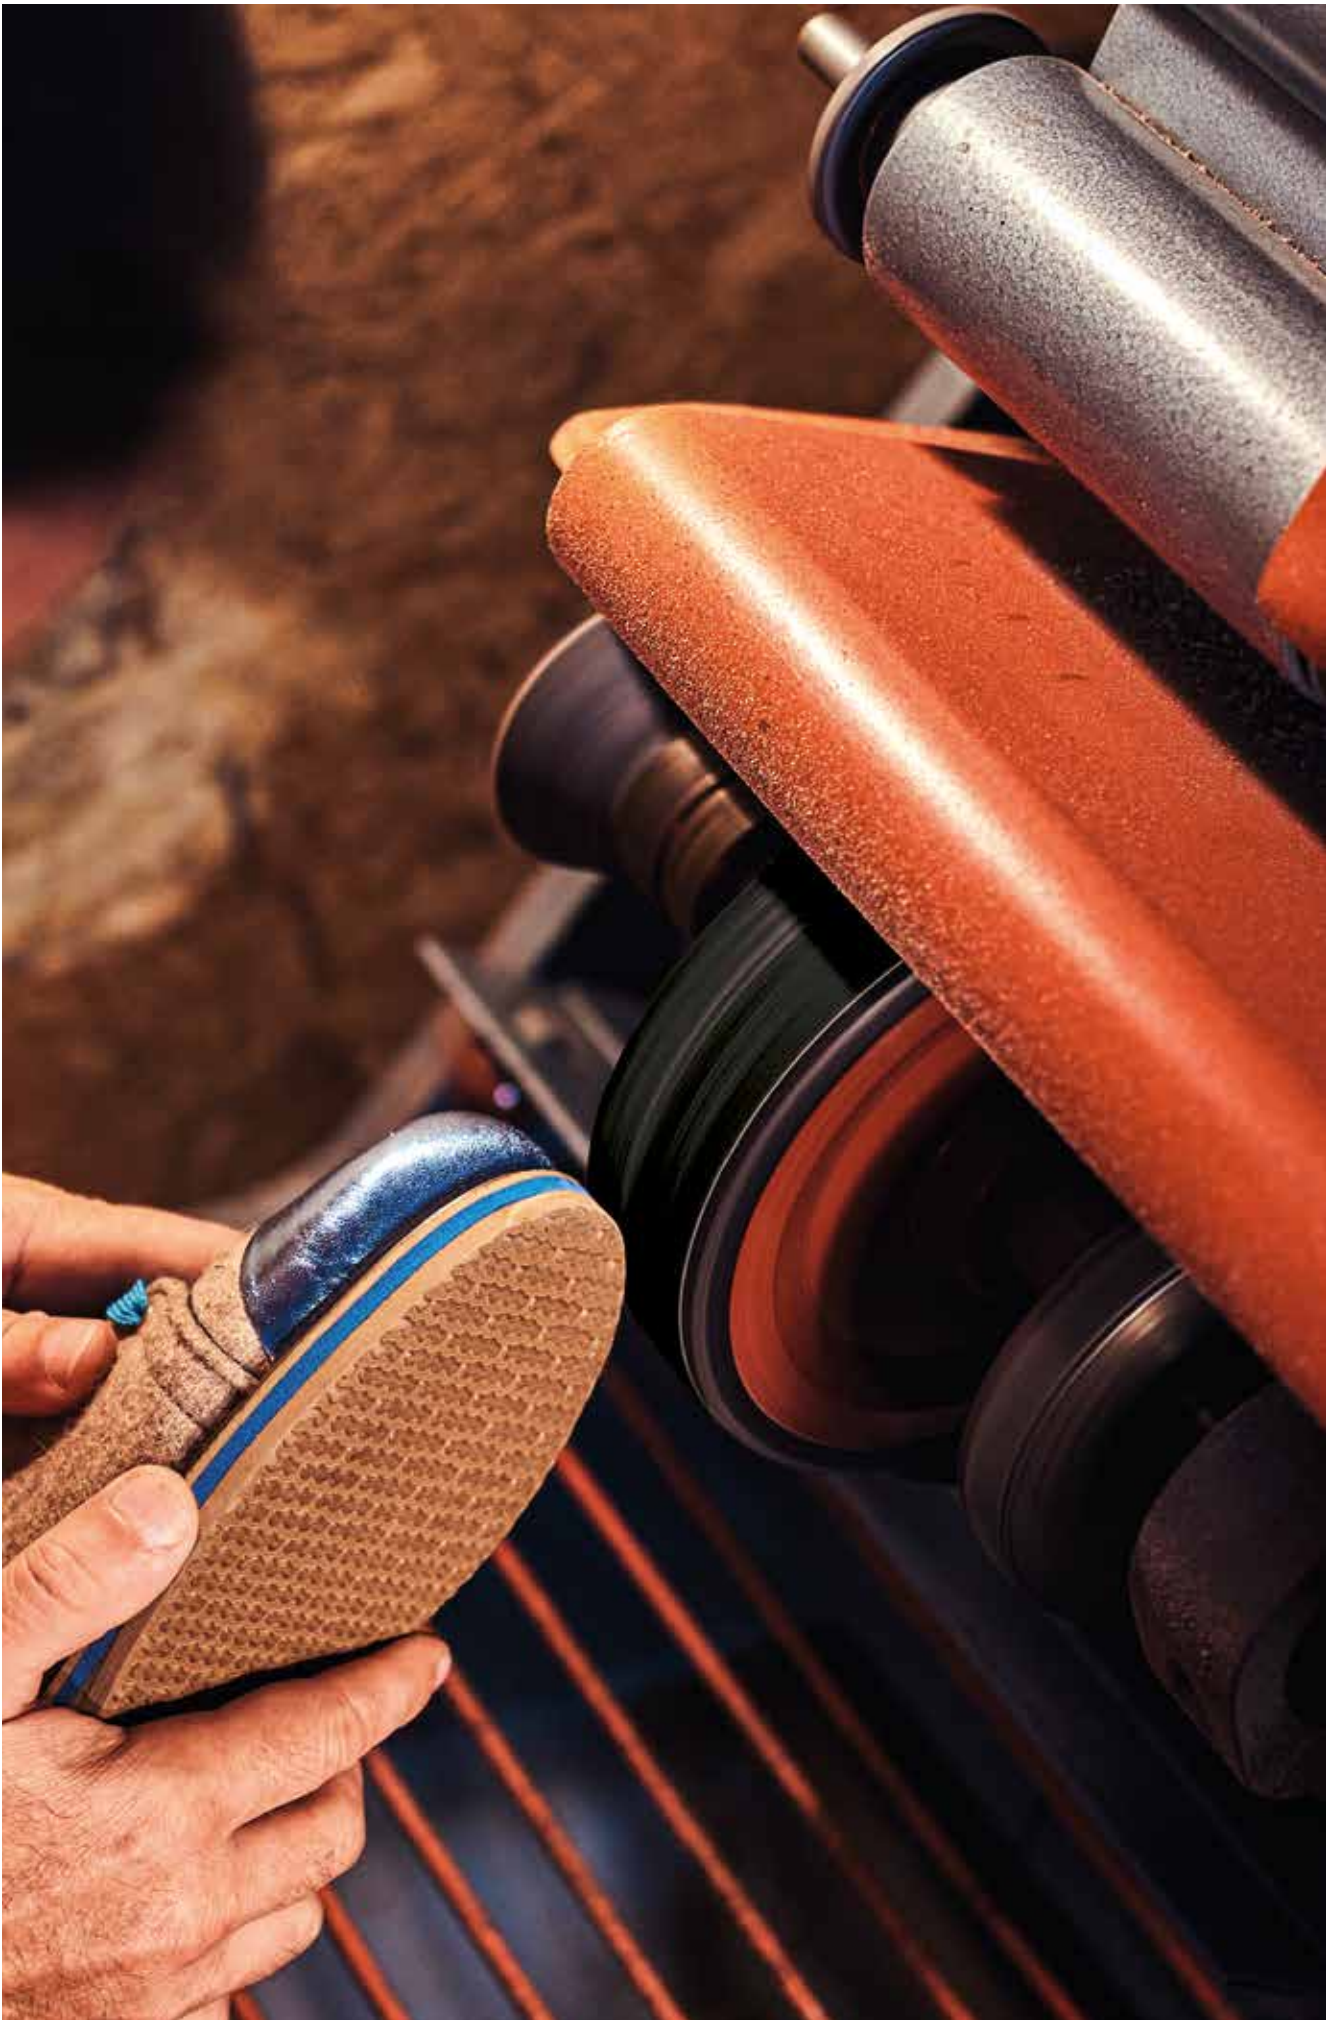

J Flexible Polycotton Cloth










RZ739

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum and zamak materials in narrow belts and rolls. J flexible poly-cotton cloth backing with close coated Zirconia abrasive. Flexible structure, ideal for polishing. Long service lifetime.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RZ739	Zirconia	J Flexible Polycotton Cloth	Closed	1400	60 - 220

Grit Range																		
				60	80	100	120	150	180	220								

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant












J Flexible Polycotton Cloth

RG739

Ideal for sanding stainless steel, high alloy steel, heat resistant steel, cast iron, aluminum, zamak, brass, copper, non-ferrous steels, plastic, rubber, leather in narrow belts and rolls. J flexible poly-cotton cloth backing with 100% Ceramic abrasive, also with friction and heat resistant Topsize coating. Long service lifetime.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RG739	100% Ceramic	J Flexible Polycotton Cloth	Topsize & Closed	1400	60 - 150

Grit Range																	
				60	80	100	120	150									

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	


Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

X Cotton Cloth





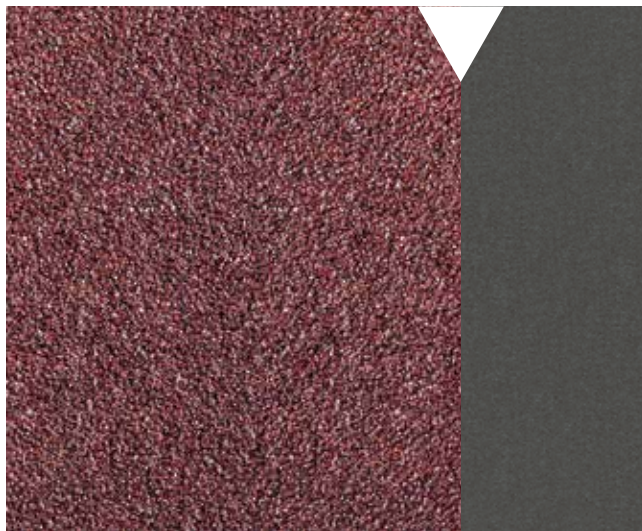




GXK51

Ideal for sanding wood, parquet, low alloy steel, stainless steel, aluminum, zamak, brass, copper, non-ferrous metals, paint, varnish, lacquer, plastic, rubber, leather, cast iron, glass, stone, granite and ceramic materials in narrow belts, rolls, velcro discs and flap wheels. Soft X cotton cloth backing with closed coated Aluminum Oxide abrasive.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
GXK51	Aluminum Oxide	X Cotton Cloth	Closed	1400	40 - 400

Grit Range																	
		40	50	60	80	100	120	150	180	220	240	280	320	400			

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant



X Polycotton Cloth










GM775

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, wood, plastic, rubber and leather in flap discs and narrow belts. X poly-cotton cloth backing with closed coated aggressive Aluminum Oxide abrasive.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
GM775	Aluminum Oxide	X Polycotton Cloth	Closed	1400	40 - 80

Grit Range																	
		40		60	80												

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant












X Polycotton Cloth

GZ777

Ideal for sanding stainless steel, high alloy steel, heat resistant steel, low alloy steel, cast iron, wood, plastic, rubber and leather in flap discs and narrow belts. X poly-cotton cloth backing with closed coated Zirconia abrasive.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
GZ777	Zirconia	X Polycotton Cloth	Closed	1400	40 - 120

Grit Range																	
		40		60	80		120										

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	


Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Y Polyester Cloth





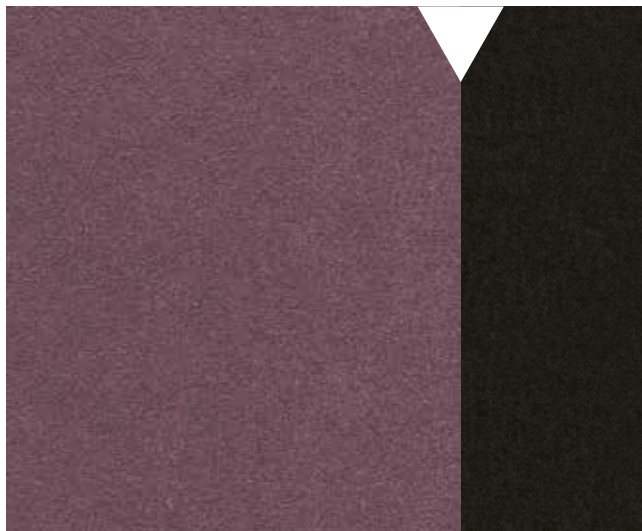




RM862

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, brass, copper, non-ferrous metals, plastic, rubber, leather, glass, stone, granite, ceramic and wood in wide belts, narrow belts, rolls and velcro discs. Y polyester cloth backing with closed coated aggressive Aluminum Oxide abrasive. Suitable for wet applications.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RM862	Aluminum Oxide	Y Polyester Cloth	Closed	1420	40 - 240

Grit Range																	
		40		60	80	100	120	150	180	220	240						

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant












Y Polyester Cloth

RC851

Ideal for sanding MDF, particle board, laminate board, plywood, wood, parquet, plastic, rubber, leather, aluminum, zamak, brass, copper, non-ferrous metals, glass, stone, granite and ceramic materials in single-joint segmented belts, wide belts, narrow belts, rolls, discs and velcro discs. Thick Y polyester cloth backing and closed coating coarse Silicon Carbide abrasive. Ideal for coarse sanding applications with coarse grits (40, 60 and 80).

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RC851	Silicon Carbide	Y Polyester Cloth	Closed	1400	36 - 400

Grit Range																	
	36	40	50	60	80	100	120	150	180	220	240	280	320	400			

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Y Polyester Cloth










RC861

Ideal for sanding MDF, chipboard, plywood, parquet, plastic, rubber, leather, aluminum, zamak, brass, copper, non-ferrous metals, glass, stone, granite and ceramic materials in single-joint segmented belts, wide belts, narrow belts, rolls, discs and velcro discs. Antistatic Y polyester cloth backing and also antistatic closed coating Silicon Carbide abrasive which prevents dust sticking. Good surface flatness for fine applications.




Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RC861	Silicon Carbide	Y Polyester Cloth	Antistatic & Closed	1400	36 - 400

Grit Range																		
	36	40	50	60	80	100	120	150	180	220	240	280	320	400				

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

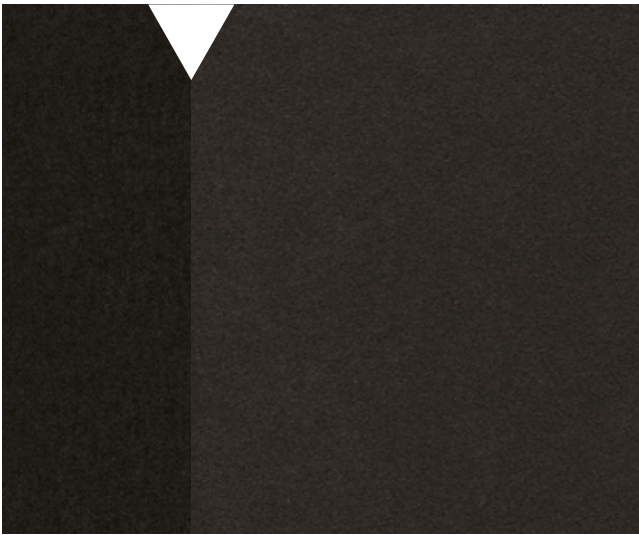










Y Polyester Cloth

RC881

Ideal for sanding HDF, MDF, solid wood, parquet, plastic, rubber, leather, aluminum, zamak, brass, copper, non-ferrous metals, glass, stone, granite and ceramic materials in multi-joint segmented belts, wide belts, narrow belts and rolls. Antistatic Y polyester cloth backing and also antistatic closed coating Silicon Carbide abrasive which prevents dust sticking.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RC881	Silicon Carbide	Y Polyester Cloth	Antistatic & Closed	1650	36 - 220

Grit Range																	
	36	40	50	60	80	100	120	150	180	220							

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Y Polyester Cloth










RZ865

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, parquet, wood, plastic, rubber and leather in wide belts, narrow belts, rolls, discs and velcro discs. Y polyester cloth backing and closed coated Zirconia and Aluminum Oxide abrasive. Suitable for wet applications. Long service lifetime.




Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RZ865	Zirconia	Y Polyester Cloth	Closed	1420	40 - 1000

Grit Range																		
				60	80	100	120	150	180									

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

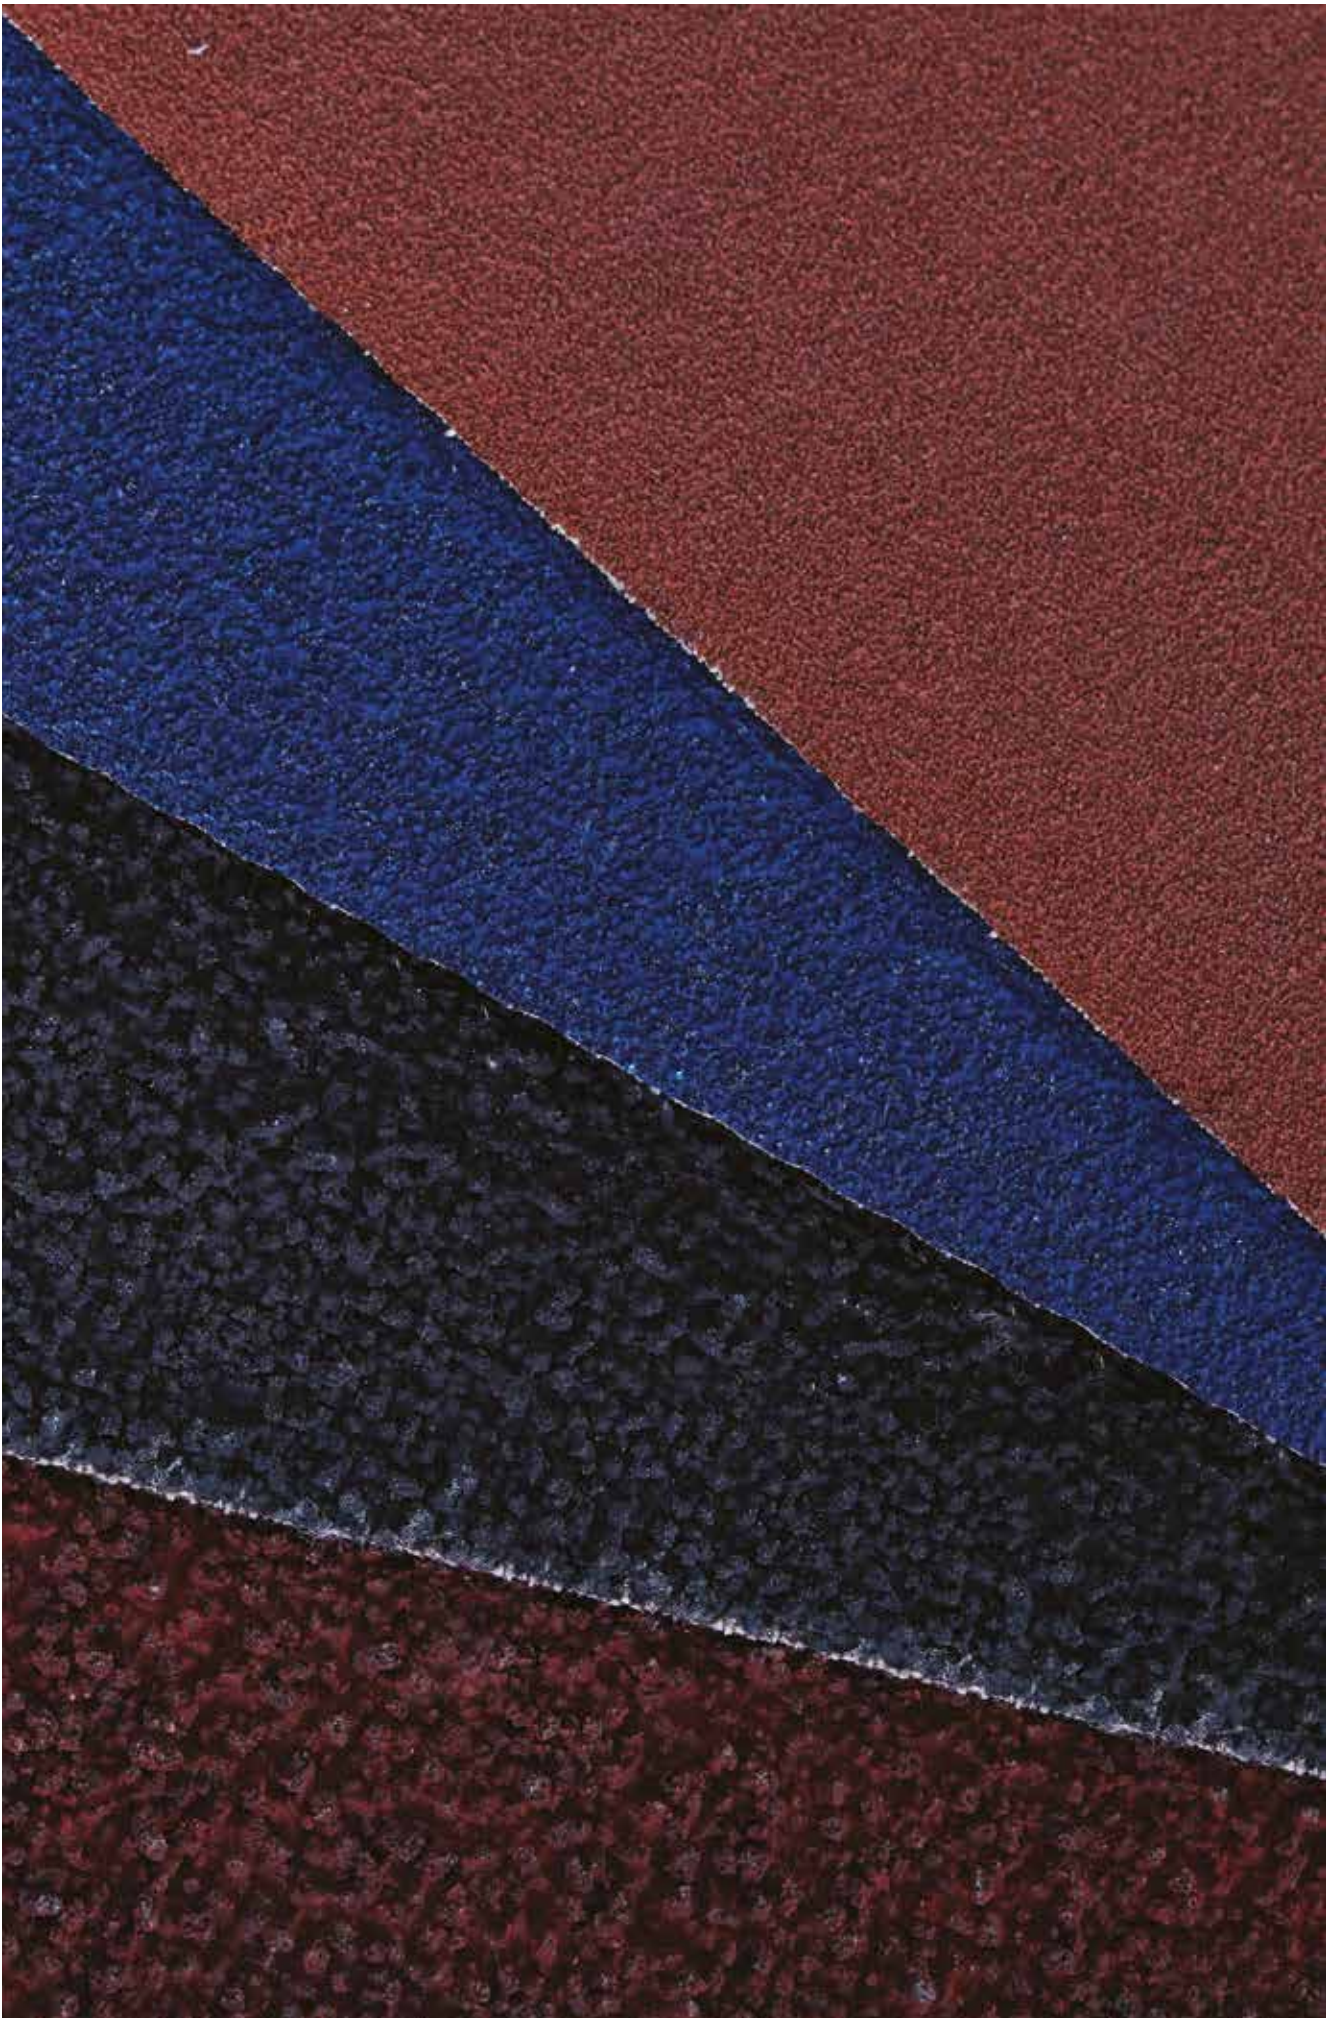

Y Polyester Cloth










RZ777

Ideal for sanding parquet, solid wood, plastic, leather and rubber in wide belts, narrow belts, rolls, discs and velcro discs. Y polyester cloth backing and semi open coated 100% Zirconia abrasives. Designed for floor sanding. Suitable for wet applications.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RZ777	100% Zirconia	Y Polyester Cloth	Semi Open	1450	24 - 120

Grit Range																		
24	36	40	50	60	80	100	120											

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant












Y Polyester Cloth

RZ873

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, plastic, leather and rubber in wide belts, narrow belts, rolls, discs and velcro discs. Y polyester cloth backing and close coated aggressive 100% Zirconia abrasive. Suitable for wet applications.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RZ873	100% Zirconia	Y Polyester Cloth	Closed	1420	24 - 120

Grit Range																	
24	36	40	50	60	80	100	120										

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Y Polyester Cloth










RG865

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, brass, copper, non-ferrous metals and cast iron materials in wide belts, narrow belts and rolls. Y polyester cloth backing with close coated Ceramic abrasive. Suitable for wet applications.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RG865	Ceramic	Y Polyester Cloth	Closed	1420	40 - 400

Grit Range																	
		40	50	60	80	100	120	150	180	220	240	280	320	400			

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant












Y Polyester Cloth

RG865S

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, brass, copper, non-ferrous metals and cast iron materials in wide belts, narrow belts and rolls. Y polyester cloth backing with close coated Ceramic abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RG865S	Ceramic	Y Polyester Cloth	Topsize & Closed	1420	40 - 150

Grit Range																	
		40	50	60	80	100	120	150									

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	


Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Y Polyester Cloth





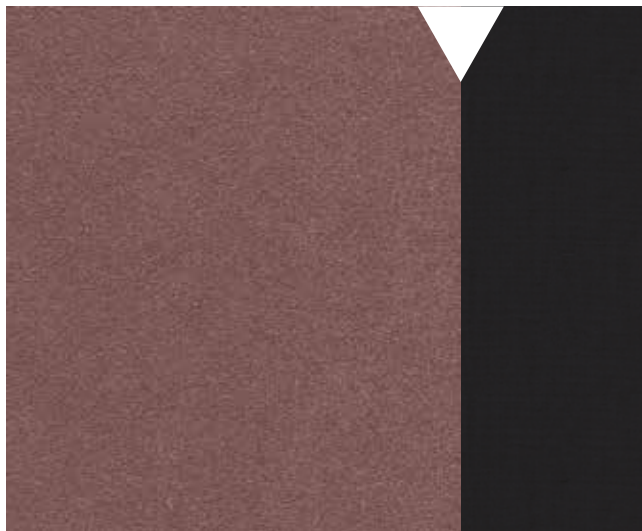




RG996

Ideal for sanding stainless steel, high alloy steel, heat resistant steel, low alloy steel, aluminum, zamak and cast iron materials in multi-joint segmented belts, wide belts, narrow belts and rolls. Y polyester cloth backing with close coated 100% Ceramic abrasive. Suitable for wet applications.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RG996	100% Ceramic	Y Polyester Cloth	Closed	1650	60 - 120

Grit Range																			
				60	80	100	120												

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant












Y Polyester Cloth

RCK71

Ideal for heavy duty sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel and cast iron materials in wide belts, narrow belts, rolls, discs and velcro discs; ideal for centerless grinding. Y polyester cloth backing with vitrified bonder of semi open coated Compact Aluminum Oxide abrasive. Suitable for dry applications. Long service lifetime.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RCK71	Compact Aluminum Oxide	Y Polyester Cloth	Semi Open	1420	80 - 1200

Grit Range																			
					80	100	120	150	180	220	240	280	320	400	500	600	800	1000	1200

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Y Polyester Cloth






RCK81

Ideal for middle duty sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel and cast iron materials in wide belts, narrow belts, rolls, discs and velcro discs; ideal for centerless grinding. Y polyester cloth backing with resined bonder of semi open coated Compact Aluminum Oxide abrasive. Suitable for wet and dry applications.




Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RCK81	Compact Aluminum Oxide	Y Polyester Cloth	Semi Open	1420	80 - 1200

Grit Range																			
					80	100	120	150	180	220	240	280	320	400	500	600	800	1000	1200

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

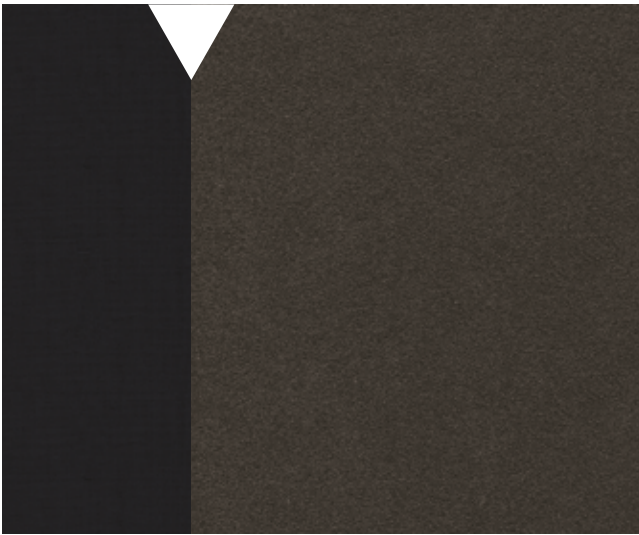










Y Polyester Cloth

RCC71

Ideal for heavy duty sanding and finishing low alloy steel, stainless steel, high alloy steel, heat resistant steel, glass, stone, granite and ceramic materials in wide belts, narrow belts, rolls, discs and velcro discs; ideal for centerless grinding. Y polyester cloth backing with vitrified bonder of semi open coated Compact Silicon Carbide abrasive. Suitable for dry applications. Long service lifetime.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RCC71	Compact Silicon Carbide	Y Polyester Cloth	Semi Open	1400	80 - 1200

Grit Range																			
					80	100	120	150	180	220	240	280	320	400	500	600	800	1000	1200

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Y Polyester Cloth






RCC81

Ideal for middle duty sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, glass, stone, granite and ceramic materials in wide belts, narrow belts, rolls, discs and velcro discs; ideal for centerless grinding. Y polyester cloth backing with resined bonder of semi open coated Compact Silicon Carbide abrasive. Suitable for wet and dry applications.




Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RCC81	Compact Silicon Carbide	Y Polyester Cloth	Semi Open	1400	80 - 1200

Grit Range																			
					80	100	120	150	180	220	240	280	320	400	500	600	800	1000	1200

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

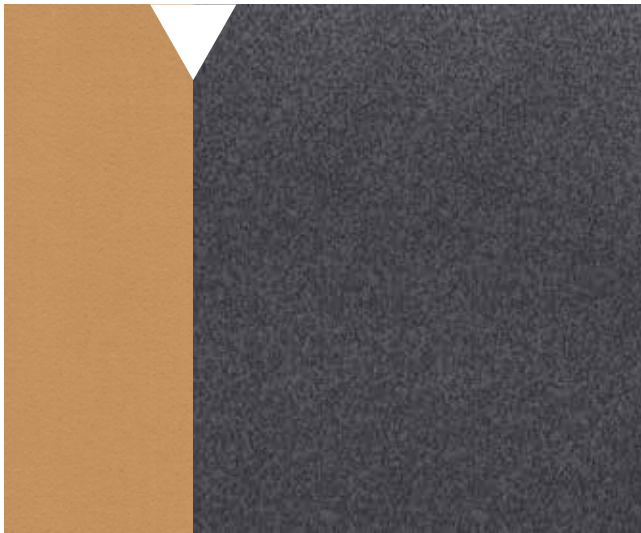










XY Polyester Cloth

RC85Y

Ideal for brush finishing low alloy steel, stainless steel, high alloy steel, heat resistant steel and cast iron materials in wide belts, narrow belts and rolls. XY polyester cloth backing with semi open coated Silicon Carbide Cork abrasive. Suitable for wet and dry applications.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RC85Y	Silicon Carbide (Cork)	XY Polyester Cloth	Semi Open	1400	240 - 1200

Grit Range																			
											240		320	400		600	800	1000	1200

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	


Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Z Polyester Cloth





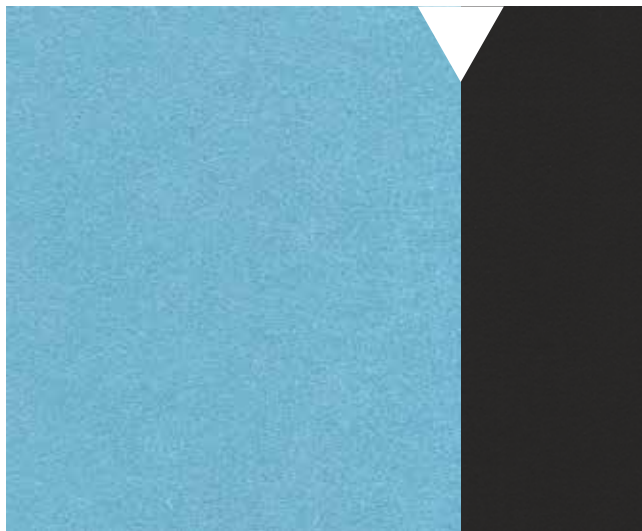




RZ877

Ideal for heavy duty sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, brass, copper, non-ferrous metals and cast iron materials in wide belts, narrow belts and rolls. Z polyester cloth backing with close coated 100% Zirconia abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications. High working efficiency.




Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RZ877	100% Zirconia	Z Polyester Cloth	Topsize & Closed	1420	24 - 120

Grit Range																			
24	36	40	50	60	80	100	120												

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

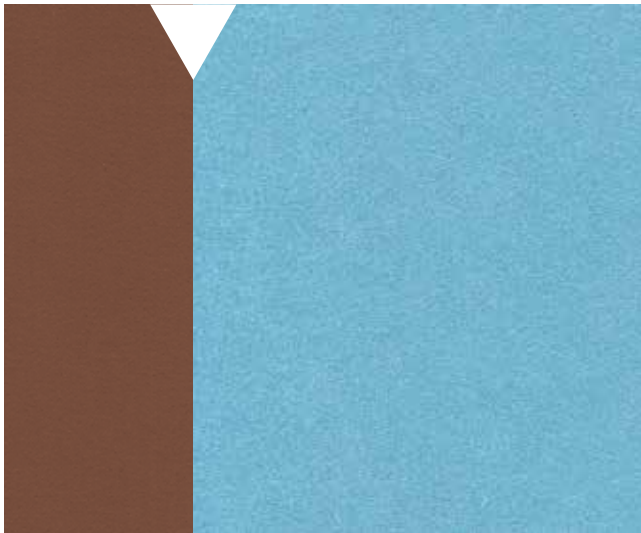










Z Polyester Cloth

RZ887

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, brass, copper, non-ferrous metals and cast iron materials in wide belts, narrow belts and rolls. Z polyester cloth backing with close coated epoxy resins 100% Zirconia abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications. Long service lifetime.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RZ887	100% Zirconia	Z Polyester Cloth	Topsize & Closed Epoxy Resins	1420	24 - 120

Grit Range																	
24	36	40	50	60	80	100	120										

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	


Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

Z Polyester Cloth





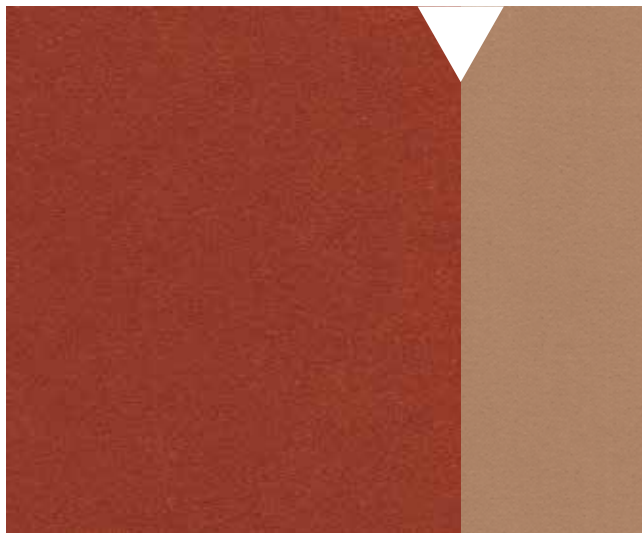




RG997

Ideal for heavy deburring and sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak and cast iron materials in wide belts, narrow belts and rolls. Z polyester cloth backing with close coated Ceramic and Zirconia abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications.




Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RZ877	Ceramic & Zirconia	Z Polyester Cloth	Topsize & Closed	1420	24 - 120

Grit Range																			
24	36	40	50	60	80	100	120												

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant

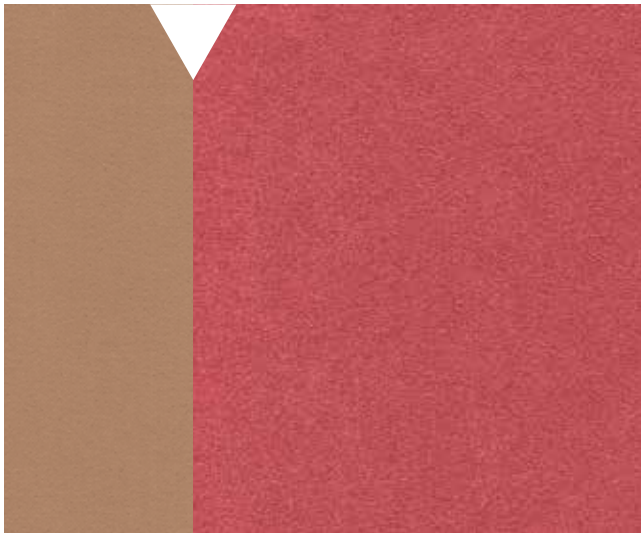










Z Polyester Cloth

RG998

Ideal for heavy deburring and sanding cast iron, high alloy steel, heat resistant steel, low alloy steel, stainless steel,, aluminum, zamak and cast iron materials in wide belts, narrow belts and rolls. Z polyester cloth backing with close coated 100% Ceramic abrasive, also with friction and heat resistant Topsize coating. Suitable for wet applications.

Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
RG998	100% Ceramic	Z Polyester Cloth	Topsize & Closed	1410	24 - 120

Grit Range																	
24	36	40	50	60	80	100	120										

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant




Innovative Industrial Solutions



Headquarters

İkitelli OSB Mah. İsteks San. Sitesi B2 Blok No:
22 34490 Başakşehir, İstanbul / Türkiye
+90 212 485 32 69
contact@yurtglobal.com

Follow Us

 /yurtglobal
 /yurtglobal
 /yurtglobal