


X Polycotton Cloth







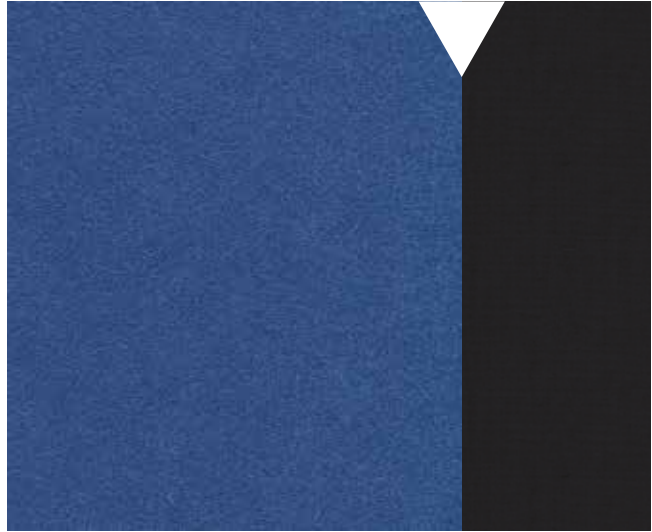


GM775

Ideal for sanding low alloy steel, stainless steel, high alloy steel, heat resistant steel, aluminum, zamak, cast iron, wood, plastic, rubber and leather in flap discs and narrow belts. X poly-cotton cloth backing with closed coated aggressive Aluminum Oxide abrasive.



Product Code	Abrasive Grain	Backing	Coating	Jumbo Width (mm)	Grit Range
GM775	Aluminum Oxide	X Polycotton Cloth	Closed	1400	40 - 80

Grit Range																	
		40		60	80												

Product Forms				
				
Jumbo	Segmented Belt (Multi Joint)	Wide Belt	Narrow Belt	Roll
				
Disc	Velcro Disc	Flap Wheel	Flap Disc	

Application Areas			
Wood	Parquet / Floor Sanding	Low Alloy Steel	Stainless Steel / Inox
High Alloy Steel / Heat Resistant Steel	Aluminium / Zamak	Brass / Copper / Non Ferrous Metals	Paint / Varnish / Lacquer
Plastic / Rubber / Leather	Cast Iron	Glass / Stone / Granite / Ceramic	

Features		
Antistatic Feature	Suitable for Wet Applications	Friction & Heat Absorbant (Top Size)
Anti-Clogging (Stearate)	Flexible for Curved Surfaces	Tear Resistant